


## Sentry

SEN

## Surge Protector with Replaceable Fuses

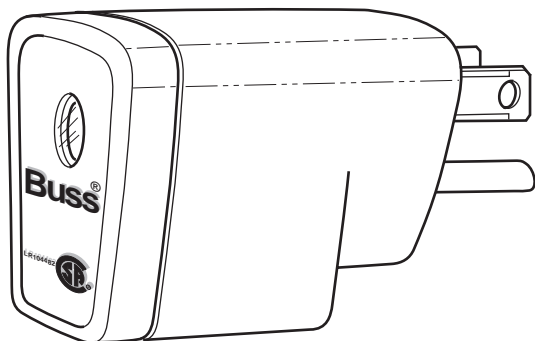

CATALOG SYMBOL: SEN

TRANSIENT VOLTAGE SPIKE PROTECTOR

RATED VOLTAGE: 125 VOLTS AC

SURGE DISSIPATION: 65 JOULES

PEAK SURGE: 6,000 VOLTS

MAXIMUM SURGE: 4,500 VOLTS

RESPONSE TIME: 1 NANOSECOND


CLAMPING VOLTAGE: 395 VOLTS

AGENCY APPROVAL: CSA CERTIFIED, LR104482

For use with Buss ECF-5, 125 VAC, 5 Amp Fuses.

**WARNING: FOR INDOOR USE ONLY.**

## Dimensional Data

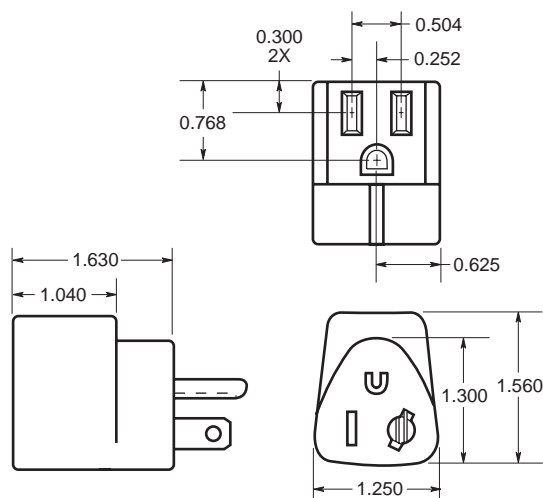


- Dual protection against voltage surges and short-circuits.
- Compact size - easy to carry.
- Indicator light - glows to show that Sentry is ready.
- Compact design provides wall-hugging connection.
- Replaceable fuses.
- Sentry can be used with all household appliances and electronics up to 4 Amps. Including Lap-top Computers, TVs, VCRs, telephones, answering machines, stereos, and similar devices.

**NOTE: Sentry is NOT a lightning arrestor and will not provide protection against direct or nearby lightning strikes.**

## Sentry

## Replacement Fuses

ECF-5



CATALOG SYMBOL: ECF-5


REPLACEMENT FUSES

VOLTAGE RATING: 125 VAC

INTERRUPTING RATING: 10,000 AIR

AGENCY APPROVALS: U.L. LISTED

## Electrical Circuit Diagram

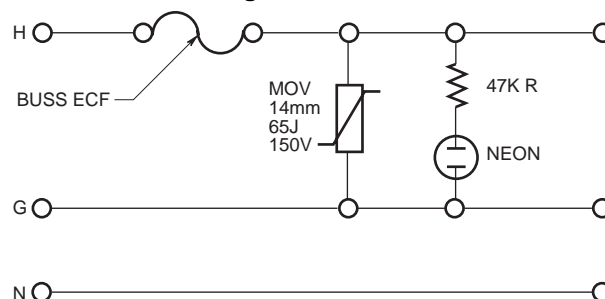

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Cooper Bussmann:

[ECF-1](#) [ECF-2](#) [ECF-3](#) [ECF-4](#) [ECF-5](#) [ECF-6](#) [ECF-8](#) [BK-ECF-1](#) [BK-ECF-1-1-2](#) [BK-ECF-3](#) [BK-ECF-3-4](#) [BK-ECF-5](#)  
[BK-ECF-8](#) [ECF-1-1-2](#) [ECF-1-2](#) [ECF-3-4](#)