

# **Switch Mode Power Supplies Encapsulated Constant Voltage**

# TLD1020-24

#### **Description:**

The TLD1020-24 is a compact and lightweight Constant Voltage Switch Mode Power Supply. Waterproof design within a 2x4 J box, IP66, NEMA 4 suitable for dry and damp locations. Convection cooled plastic housing. Designed for outdoor and indoor applications. Some typical applications include LEDs, Lighting, etc.

## Specifications (@25C)

## **Electrical Specifications:**

Input Voltage: 100-304Vac<sup>1</sup>
Input Frequency Range: 47-63Hz

 Max Input Current:
 0.3A @ 115Vac; 0.15A @ 230Vac

 Max Inrush Current:
 <5A@115Vac, 10A@220Vac</td>

 Power Factor:
 >0.9 at full load, 115Vac

 Output:
 24Vdc±5%, .830Adc Max

Crest Factor (lpk):1.5 Max.Leakage Current:300µA TypicalEfficiency:84% Typical at full load

Maximum power: 20W

Current Accuracy: ±1% (when applicable)

Load Regulation: ±3%

Hold up time: Half cycle minimum at 120 VAC and 80% of rated voltage Protection: Over-voltage, Over current and Short circuit protection:

Auto-recovery

#### **Environmental Specifications:**

Operating Temperature: -30 to 60°C (De-rating: 1%/°C from 60-70°C)

Storage Temperature: -40 to 85°C

Operating Humidity: 5 to 95% RH (non-Condensing)

Cooling: Convection cooling

**Vibration:** 5 to 50Hz

MTBF: >100,000 Hours at full load and 25°C ambient conditions EMC: Compliant to 47CFR, Part 2, Part 15 and Cispr PUB, 22

Class B

### **General Specifications:**

Connections: 5in leads - Input: 18 AWG; Output: 18 AWG, Black (-), Gray (+)

Dimensions (WxLxH): 40.0x95.0x25mm

Weight: 120g

Warranty: 3 years @ 40°C, 100% Load

#### **Safety Standards:**


Standards: UL (cUL) 1310, UL48



RoHS Compliance: This power supply meets the requirements 2002/95/EC, know as the RoHS initiative.

Upon printing, this document is considered %uncontrolled+ Please contact Triad Magneticsqwebsite for the most current version.

For Illustration Only

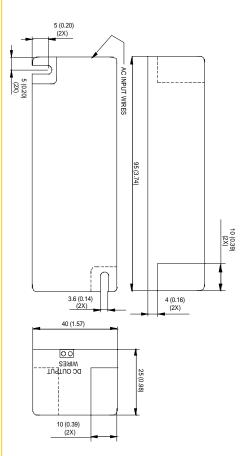

<sup>&</sup>lt;sup>1</sup> Parts manufactured before November, 2010 have an input voltage range of 90 – 264VAC.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Triad Magnetics: