

EC9B

S E R I E S

30 WATT 2:1 INPUT DC-DC CONVERTERS



Features

- 30W Isolated Output
- Efficiency to 92%
- 2"x1" Six-Sided Shield Metal Case
- Fixed Switching Frequency
- 2: 1 Input Range
- Regulated Outputs
- Input Under Voltage Protection
- Over Current Protection
- Remote On/Off
- Continuous Short Circuit Protection
- No Tantalum Capacitor Inside
- CE Mark Meets 2004/108/EC
- Safety Meets UL60950-1, EN60950-1, and IEC60950-1

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	Capacitor Load max.
			MIN.	MAX.	NO LOAD	FULL LOAD		
EC9B-12S33	9-18 VDC	3.3 VDC	0mA	7500mA	170mA	2371mA	87	7500μF
EC9B-12S05		5 VDC	0mA	6000mA	150mA	2841mA	88	6000μF
EC9B-12S12		12 VDC	0mA	2500mA	55mA	2732mA	91.5	2500μF
EC9B-12S15		15 VDC	0mA	2000mA	80mA	2762mA	90.5	2000μF
EC9B-12D12		±12 VDC	0mA	±1250mA	55mA	2793mA	89.5	1250μF
EC9B-12D15		±15 VDC	0mA	±1000mA	60mA	2778mA	90	1000μF
EC9B-24S33	18-36 VDC	3.3 VDC	0mA	7500mA	110mA	1172mA	88	7500μF
EC9B-24S05		5 VDC	0mA	6000mA	90mA	1389mA	90	6000μF
EC9B-24S12		12 VDC	0mA	2500mA	50mA	1359mA	92	2500μF
EC9B-24S15		15 VDC	0mA	2000mA	80mA	1374mA	91	2000μF
EC9B-24D12		±12 VDC	0mA	±1250mA	40mA	1366mA	91.5	1250μF
EC9B-24D15		±15 VDC	0mA	±1000mA	40mA	1366mA	91.5	1000μF
EC9B-48S33	36-75 VDC	3.3 VDC	0mA	7500mA	70mA	586mA	88	7500μF
EC9B-48S05		5 VDC	0mA	6000mA	50mA	698mA	89.5	6000μF
EC9B-48S12		12 VDC	0mA	2500mA	30mA	687mA	91	2500μF
EC9B-48S15		15 VDC	0mA	2000mA	50mA	691mA	90.5	2000μF
EC9B-48D12		±12 VDC	0mA	±1250mA	40mA	691mA	90.5	1250μF
EC9B-48D15		±15 VDC	0mA	±1000mA	45mA	691mA	90.5	1000μF

NOTE: 1. Nominal Input Voltage 12, 24 or 48 VDC

Specifications

INPUT SPECIFICATIONS:

Input Voltage Range.....	12V.....	9-18V
	24V.....	18-36V
	48V.....	36-75V
Input Surge Voltage(100ms max.).....	12V.....	25Vdc max.
	24V.....	50Vdc max.
	48V.....	100Vdc max.
Under Voltage lockout.....	12Vin Power Up.....	8.8V
	12Vin Power Down.....	8.0V
	24Vin Power Up.....	17V
	24Vin Power Down.....	16V
	48Vin Power Up.....	34V
	48Vin Power Down.....	32V
Positive Logic Remote ON/OFF (see note 3 & 4)		
Input Filter.....		Pi Type


OUTPUT SPECIFICATIONS:

Voltage Accuracy.....	±1.0% max.
Voltage Balance (Dual).....	±1.0% max.
Transient Response: 75% - 100% Step Load Change	
Error Band.....	±5% Vout Nominal, Recovery Time.....<250us
Ripple & Noise, 20MHz BW (Measured with 0.1µF MLCC)	
3.3V & 5V	75mV pk-pk, max.
12V & 15V & ±12V & ±15V	100mV pk-pk max.
Temperature Coefficient.....	±0.03%/°C
Line Regulation ¹	Single/Dual.....±0.2% max.
Load Regulation ²	Single.....±0.5% max.
	Dual.....±1.0% max.
Cross Regulation (Dual Output) Load Cross Variation 10%/100% ...	±5% max.
Over Voltage Protection.....	Zener or TVS Clamp
Output Short Circuit Protection.....	Continuous
Output Current Limit, % Nominal Output	110% ~ 150%
External Trim Adj. Range (Single Output Models Only)	±10%
Start Up Time	5ms typ.


GENERAL SPECIFICATIONS:

Efficiency.....	See Table
Isolation Voltage.....	Input/Output.....1500VDC max.
Isolation Resistance.....	10 ⁹ Ohms min.
Isolation Capacitance.....	1000pF Typ.
Switching Frequency.....	400KHz, Typical
EMI/RFI.....	Six Sided Continuous Shield
Operating Ambient Temperature.....	-40°C to +85°C
De-Rating, Above 65°C.....	Linearly to Zero Power at 105°C
Case Temperature ³	105°C max.
Storage Temperature.....	-55°C to +125°C
Cooling.....	Natural Convection
Thermal Shutdown, Case Temp.	110°C
Humidity	95% RH max. Non-Condensing
MTBF	MIL-STD-217F, GB, 25°C, Full Load
	Single
	Dual
Dimensions	2 x 1 x 0.4 inches (50.8 x 25.4 x 10.2 mm)
Case Material	Black Coated Copper with Non-Conductive Base
Weight	35g

EC9B Series Derating Curve

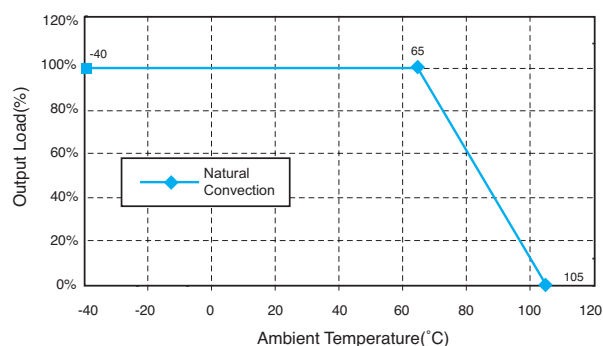

External Output Trim



NOTE:


- Measured From High Line to Low Line
- Measured From Full Load to 10% Load
- Logic Compatibility.....CMOS or Open Collector TTL, ref. to - Vin
Module ON.....>3.5VDC to 75VDC or Open Circuit
Module OFF.....<1.2VDC
- Suffix 'N' to the Model Number with Negative Logic Remote ON/OFF
Module ON.....<1.2VDC
Module OFF.....>3.5VDC to 75VDC or Open Circuit
- Maximum case temperature under any operating condition should not be exceeded 105°C

PIN CONNECTION

Pin	Single Output	Dual Output
1	+V Input	+V Input
2	-V Input	-V Input
3	+V Output	+V Output
4	Trim	-V Output
5	-V Output	Common
6	Remote ON/OFF	

CASE B

All Dimensions In Inches(mm)
Tolerance Inches: .xx= ±.02, .xxx= ±.010
Millimeters: .xx= ±0.5, .xxx= ±0.25

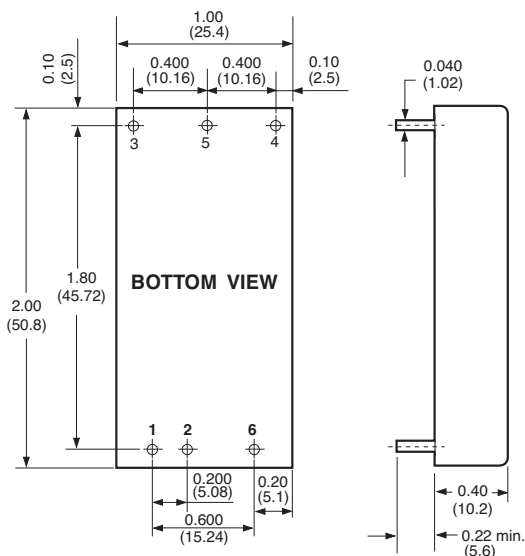

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

[EC9B-12D12](#) [EC9B-12D15](#) [EC9B-12S05](#) [EC9B-12S12](#) [EC9B-12S15](#) [EC9B-12S33](#) [EC9B-24D12](#) [EC9B-24D15](#)
[EC9B-24S05](#) [EC9B-24S12](#) [EC9B-24S15](#) [EC9B-24S33](#) [EC9B-48D12](#) [EC9B-48D15](#) [EC9B-48S05](#) [EC9B-48S12](#)
[EC9B-48S15](#) [EC9B-48S33](#)