

DC Feedthrough Capacitor

SCHAFNER
energy efficiency and reliability



- IEC/EN 60384-14 approval
- Rated currents from 10 to 200A
- 2.5kV pulse test capability
- Class Y4 capacitor

Approvals




RoHS

Technical specifications

Maximum continuous operating voltage:	130VDC (UL, ENEC)
	130VAC, 50/60Hz (UL, ENEC)
	650VDC max.
Rated currents:	10 to 200A @ 60°C max.
Capacitor class:	Y4
High potential test voltage:	1700VDC for 2 sec
Insulation resistance (100VDC after 60 sec):	< 0.33μF, R > 1500MΩ
	> 0.33μF, τ > 5000s
Temperature range (operation and storage):	-40°C to +100°C (40/100/21)
Flammability corresponding to:	UL 94V-2 or better
MTBF @ 60°C/130V (Mil-HB-217F):	< 200A: > 1,400,000 hours
	≥ 200A: > 450,000 hours

Typical electrical schematic



Feedthrough capacitors offer a high insertion loss across a broad band of frequencies from a few tens of kHz up to the GHz region. The construction of feedthrough capacitors cause a better suppression performance over a much wider frequency range than a conventional two-wire capacitor of equivalent value. Different versions are available offering a wide selection on operating currents and performance levels. DC feedthrough capacitors are designed and approved for 130VDC/130VAC 50/60Hz operation.

Features and benefits

- Very low internal series inductance.
- Very high self-resonant frequency.
- Self-healing dielectric.
- High quality and reliability.
- Through-bulkhead mounting.
- Anti-twist protection.
- Custom-specific or dual-versions on request.

Typical applications

- Power line filter for 48VDC battery power
- Increasing system and information security
- Telecom base stations
- Switching and cellular equipment
- Computer servers
- UPS power supplies
- Medical equipment

Feedthrough selector table

Feedthrough	Rated current @ 60°C	Leakage current* @ 130VAC/50Hz	Capacitance** C	DC resistance*** R @ 25°C	Weight
	[A]	[mA]	[nF]	[mΩ]	[g]
FN7560-10-M3	10	0.49	10	0.8	15
FN7562-16-M4	16	4.9	100	0.62	34
FN7563-16-M4	16	23	470	0.63	78
FN7562-32-M4	32	4.9	100	0.62	34
FN7563-32-M4	32	23	470	0.63	79
FN7560-63-M6	63	0.49	10	0.3	70
FN7561-63-M6	63	2.3	47	0.3	70
FN7562-63-M6	63	4.9	100	0.3	70
FN7563-63-M6	63	23	470	0.43	103
FN7560-100-M8	100	2.3	47	0.23	145
FN7561-100-M8	100	4.9	100	0.23	145
FN7562-100-M8	100	23	470	0.23	145
FN7563-100-M8	100	49	1000	0.25	192
FN7560-200-M10	200	4.9	100	0.16	160
FN7561-200-M10	200	23	470	0.16	160
FN7562-200-M10	200	49	1000	0.18	268
FN7563-200-M10	200	230	4700	0.14	490

* Tolerance +20%


** Tolerance ±20%

*** Tolerance +15%

Typical filter attenuation


50Ω system

10A types




A = FN 7560-10-M3


16A types

A = FN 7563-16-M4
B = FN 7562-16-M4


32A types

A = FN 7563-32-M4
B = FN 7562-32-M4


63A types

A = FN 7563-63-M6
B = FN 7562-63-M6
C = FN 7561-63-M6
D = FN 7560-63-M6

100A types


A = FN 7563-100-M8
B = FN 7562-100-M8
C = FN 7561-100-M8
D = FN 7560-100-M8

200A types


A = FN 7563-200-M10
B = FN 7562-200-M10
C = FN 7561-200-M10
D = FN 7560-200-M10

Mechanical data


10A types

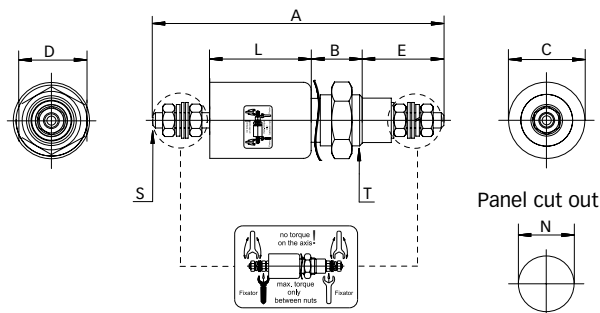

16 to 32A types

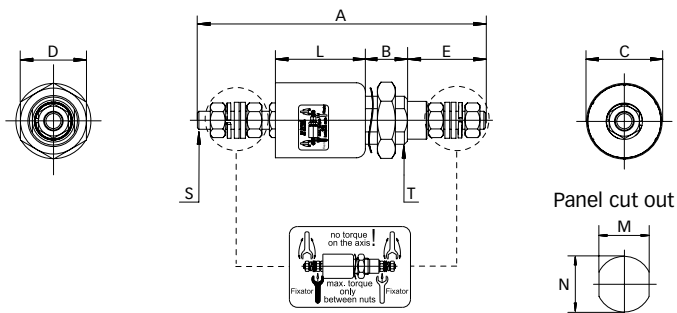

63 to 200A types

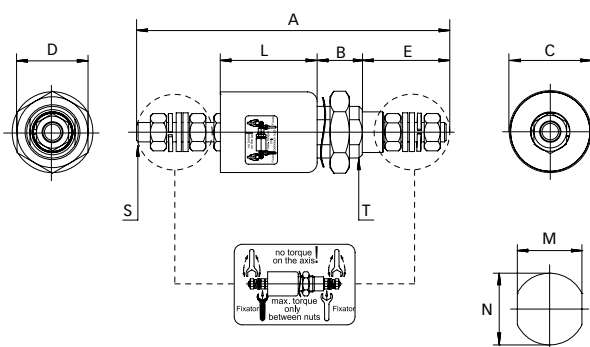

Dimensions

	A	B	C	D	E	L	M	N	S	T
FN7560-10-M3	57	10	15	13	16	19		Ø10.3	M3	M10x1
FN7562-16-M4	75	12	20	17	18	30	10.3	Ø12.3	M4	M12x1
FN7563-16-M4	82	16	32	27	18	33	18.3	Ø20.3	M4	M20x1
FN7562-32-M4	75	12	20	17	18	30	10.3	Ø12.3	M4	M12x1
FN7563-32-M4	82	16	32	27	18	33	18.3	Ø20.3	M4	M20x1
FN7560-63-M6	96	14	25	22	26	30	14.3	Ø16.3	M6	M16x1
FN7561-63-M6	96	14	25	22	26	30	14.3	Ø16.3	M6	M16x1
FN7562-63-M6	96	14	25	22	26	30	14.3	Ø16.3	M6	M16x1
FN7563-63-M6	99	16	32	27	26	33	18.3	Ø20.3	M6	M20x1
FN7560-100-M8	113	16	32	27	32	33	18.3	Ø20.3	M8	M20x1
FN7561-100-M8	113	16	32	27	32	33	18.3	Ø20.3	M8	M20x1
FN7562-100-M8	113	16	32	27	32	33	18.3	Ø20.3	M8	M20x1
FN7563-100-M8	133	19	38	27	32	50	22.3	Ø24.3	M8	M24x1
FN7560-200-M10	130	19	32	27	40	33	22.3	Ø24.3	M10	M24x1
FN7561-200-M10	130	19	32	27	40	33	22.3	Ø24.3	M10	M24x1
FN7562-200-M10	147	19	38	27	40	50	22.3	Ø24.3	M10	M24x1
FN7563-200-M10	165	19	54	41	40	68	24.3	Ø27.3	M10	M27x1.5
Tolerances	±2						±0.2			

All dimensions in mm; 1 inch = 25.4mm

Tolerances according: ISO 2768-m / EN 22768-m

Recommended torque

	M3	M4	M6	M8	M10	M10x1	M12x1	M16x1	M20x1	M24x1	M27x1.5
Terminal thread	0.5Nm	1.2Nm	2.5Nm	5Nm	8Nm						
Mounting thread						2Nm	3Nm	4Nm	7Nm	8Nm	12Nm

**Headquarters and
global innovation and
development center**

Schaffner Group
Nordstrasse 11
4542 Luterbach
Switzerland
T +41 32 681 66 26
F +41 32 681 66 30
info@schaffner.ch
www.schaffner.com

Sales and application centers

China

Schaffner EMC Ltd. Shanghai
T20-3, No 565 Chuangye Road
Pudong New Area
Shanghai 201201/China
T +86 21 3813 9500
F +86 21 3813 9501/02
cschina@schaffner.com
www.schaffner.com

Finland

Schaffner Oy
Tynninkuja 7
08700 Lohja
T +358 19 35 72 71
F +358 19 32 66 10
finlandsales@schaffner.com

France

Schaffner EMC S.A.S.
112, Quai de Bezons
95103 Argenteuil
T +33 1 34 34 30 60
F +33 1 39 47 02 28
francesales@schaffner.com

Germany

Schaffner Deutschland GmbH
Schoemperlenstrasse 12B
76185 Karlsruhe
T +49 721 56910
F +49 721 569110
germanysales@schaffner.com

Italy

Schaffner EMC S.r.l.
Via Galileo Galilei, 47
20092 Cinisello Balsamo (MI)
T +39 02 66 04 30 45/47
F +39 02 61 23 943
italysales@schaffner.com

Japan

Schaffner EMC K.K.
Mitsui-Seimei Sangenjaya Bldg. 7F
1-32-12, Kamiyama, Setagaya-ku
Tokyo 154-0011
T +81 3 5712 3650
F +81 3 5712 3651
japansales@schaffner.com
www.schaffner.jp

Sweden

Schaffner EMC AB
Turebergstorg 1, 6
19147 Sollentuna
T +46 8 5792 1121/22
F +46 8 92 96 90
swedensales@schaffner.com

Switzerland

Schaffner EMV AG
Nordstrasse 11
4542 Luterbach
T +41 32 681 66 26
F +41 32 681 66 41
sales@schaffner.ch

Singapore

Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1
05-09 Kampong Ubi Industrial
Estate
T +65 6377 3283
F +65 6377 3281
singaporesales@schaffner.com

Spain

Schaffner EMC España
Calle Caléndula 93,
Miniparc III, Edificio E
El Soto de la Moraleja,
Alcobendas
28109 Madrid
T +34 618 176 133
spainsales@schaffner.com

Taiwan

Schaffner EMV Ltd.
6th Floor, No 413
Rui Guang Road
Neihu District
Taipei City 114
T +886 2 87525050
F +886 2 87518086
taiwansales@schaffner.com

Thailand

Schaffner EMC Co. Ltd.
Northern Region Industrial Estate
67 Moo 4 Tambon Ban Klang
Amphur Muang P.O. Box 14
Lamphun 51000
T +66 53 58 11 04
F +66 53 58 10 19
thailandsales@schaffner.com

UK

Schaffner Ltd.
5 Ashville Way
Molly Millars Lane
Wokingham
Berkshire RG41 2PL
T +44 118 9770070
F +44 118 9792969
uksales@schaffner.com
www.schaffner.uk.com

USA

Schaffner EMC Inc.
52 Mayfield Avenue
Edison, New Jersey 08837
T +1 732 225 9533
F +1 732 225 4789
usasales@schaffner.com
www.schaffner.com/us

To find your local partner within
Schaffner's global network, please go to

www.schaffner.com

December 2011

© 2011 Schaffner Group
Specifications are subject to change
without notice. The latest version of the
data sheets can be obtained from the
website. All trademarks recognized.

Schaffner is an ISO-registered company.
Its products are designed and manufac-
tured under the strict quality and environ-
mental requirements of the ISO 9001 and
ISO 14001 standards.

This document has been carefully checked.
However, Schaffner does not assume any
liability for errors or inaccuracies.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schaffner:](#)

[FN7561-30-M6S](#)