


25 PIN MALE DSUB ASSEMBLY
METAL SHELL AND JACKSCREWS
BOTH ENDS
(SEE NOTE 2)

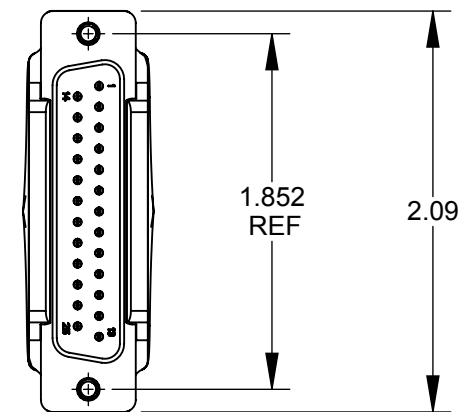

PART NO.	CABLE LENGTH "X"
DB25M02DB25M	2.00 FT +/- 1.50 IN
DB25M05DB25M	5.00 FT +/- 1.50 IN
DB25M10DB25M	10.00 FT +/- 1.50 IN
DB25M15DB25M	15.00 FT +/- 1.50 IN

CUSTOMER DRAWING

NOTES:

- THE PRODUCT COMES COILED AND PACKAGED IN A BAG.
- JACKSCREWS ARE SHIPPED UNASSEMBLED. CABLE COMES WITH BOTH #4-40 THREAD (4) AND #M3 THREAD (4) JACKSCREWS.
- MATERIALS:
DSUB - COPPER ALLOY, NICKEL PLATED WITH GOLD PINS
CABLE - COPPER, THERMOPLASTIC
JACKSCREWS - STAINLESS STEEL
- THIS PRODUCT IS RoHS COMPLIANT.

					<div>UNLESS OTHERWISE SPECIFIED</div> <div>1. ALL DIMENSIONS IN INCHES</div> <div>- TWO PLACE DECIMALS ±0.02</div> <div>- THREE PLACE DECIMALS ±0.005</div>	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.											
						SIZE	WIDTH		MULT		LBS/M		TEMPER				
						FINISH						MATERIAL					
						SPEC No.						SPEC No.					
						FIRST USED ON				SCALE 1:1		<div>Switchcraft®</div>					
B	26637	10/4/10	RS	TJK		DATE DRAWN	BY	CHKD		APVD							
A	25716	10/03/07	JGK	TJK		9/5/2006	JGK	RS 11/19/10		TJK 11/19/10		SHEET 1 OF 1					
REV	ECO NUMBER	DATE	BY	APVD	NAME						PART No.				REV		
REVISIONS					DO NOT SCALE DRAWING	DB25M TO DB25M, RoHS						DB25M_ _DB25M				B	