



GBPC 15, 25, 35 SERIES

High Current 15, 25, 35 AMPS. Single Phase
Glass Passivated Bridge Rectifiers

GBPC, GBPC-W, GBPC-M

Dimensions in Page. 3

Features

- ✧ UL Recognized File # E-326243
- ✧ The plastic material used carries Underwriters Laboratory Flammability Classification 94V-0
- ✧ Integrally molded heatsink provide very low thermal resistance for maximum heat dissipation
- ✧ Surge overload ratings from 300 amperes to 400 amperes
- ✧ Typical IR less than 0.2 uA
- ✧ High temperature soldering guaranteed:
260°C/10 seconds at 5 lbs.,(2.3kg) tension
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode

Mechanical Data

- ✧ Case: Molded plastic body
- ✧ Terminals: Pure tin plate, Lead free, leads solderable per MIL-STD-202, Method 208
- ✧ Weight: 16.95 grams
- ✧ Mounting Torque : 20 in-lbs Max.

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	-005	-01	-02	-04	-06	-08	-10	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_C=55^{\circ}C$ GBPC15 GBPC25 GBPC35	$I_{F(AV)}$	15 25 35							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	300 300 400							A
Maximum Instantaneous Forward Voltage Drop Per Element at Specified Current (Note 1)	V_F	GBPC15 7.5A GBPC25 12.5A GBPC35 17.5A 1.1							V
Maximum Reverse Current @ Rated VR	I_R	5							uA
Typical Thermal Resistance	$R_{\theta JC}$	1.5							°C/W
Operating Temperature Range	T_J	- 55 to + 150							°C
Storage Temperature Range	T_{STG}	- 55 to + 150							°C

Note 1 : Pulse Test with PW=300 usec, 1% Duty Cycle

Note 2 : Suffix "W" - Wire Lead Structure/"M" - Terminal Location Face to Face

(GBPC15005 THRU GBPC1510)
RATINGS AND CHARACTERISTIC CURVES (GBPC25005 THRU GBPC2510)
(GBPC35005 THRU GBPC3510)

FIG. 1 FORWARD CURRENT DERATING CURVE

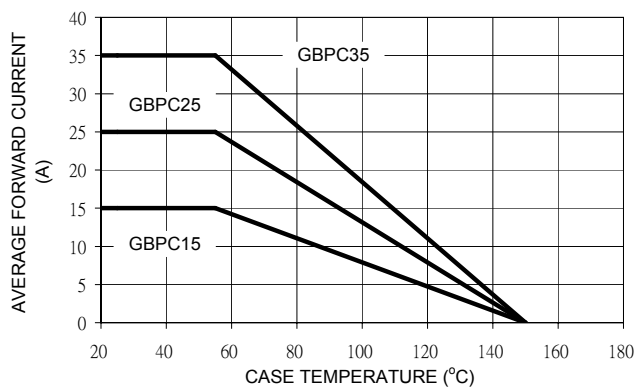


FIG. 2 TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

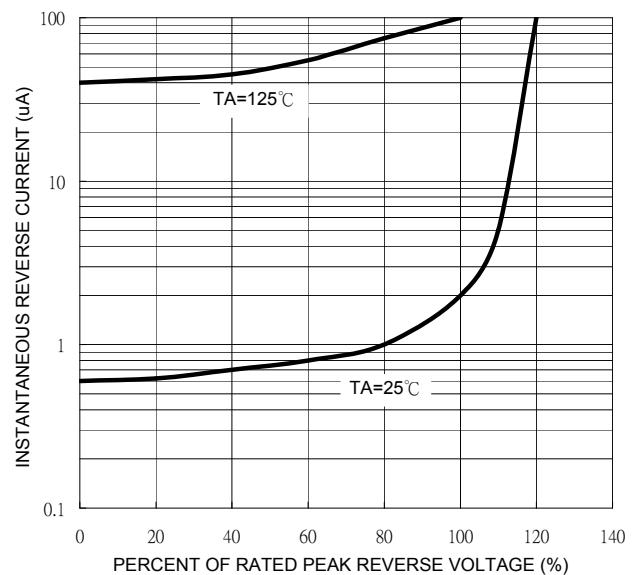


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

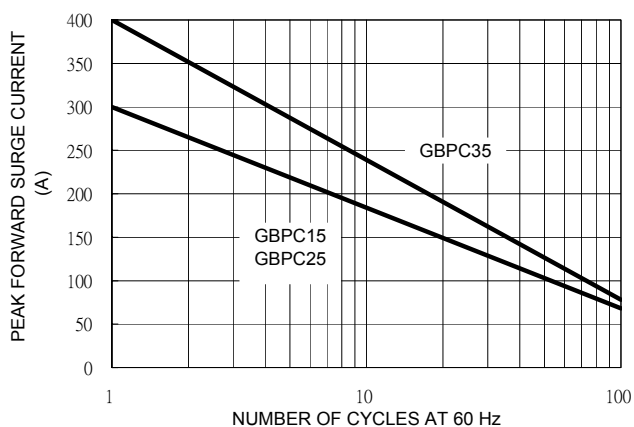


FIG. 5 TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT


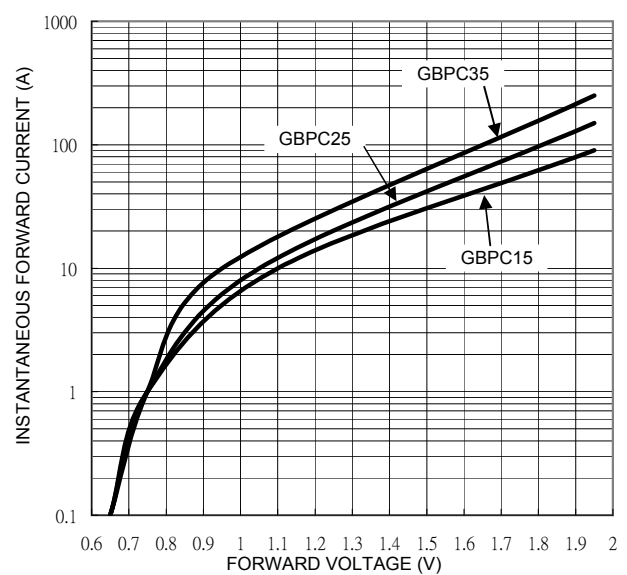



FIG. 4 TYPICAL JUNCTION CAPACITANCE

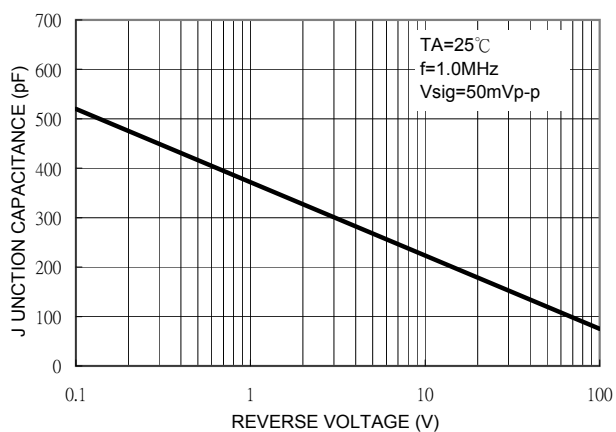


DIMENSIONS

(GBPC15005 THRU GBPC1510)
(GBPC25005 THRU GBPC2510)
(GBPC35005 THRU GBPC3510)


GBPC

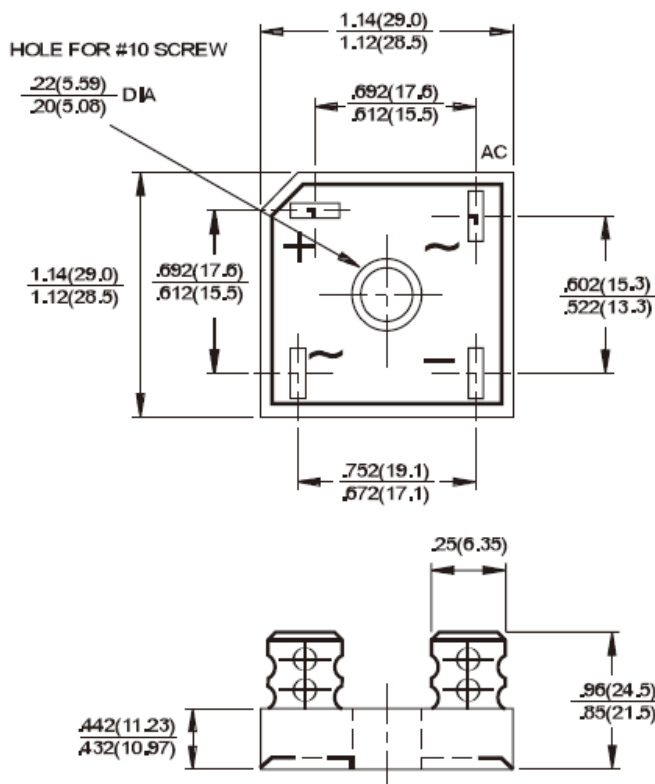

GBPC-W

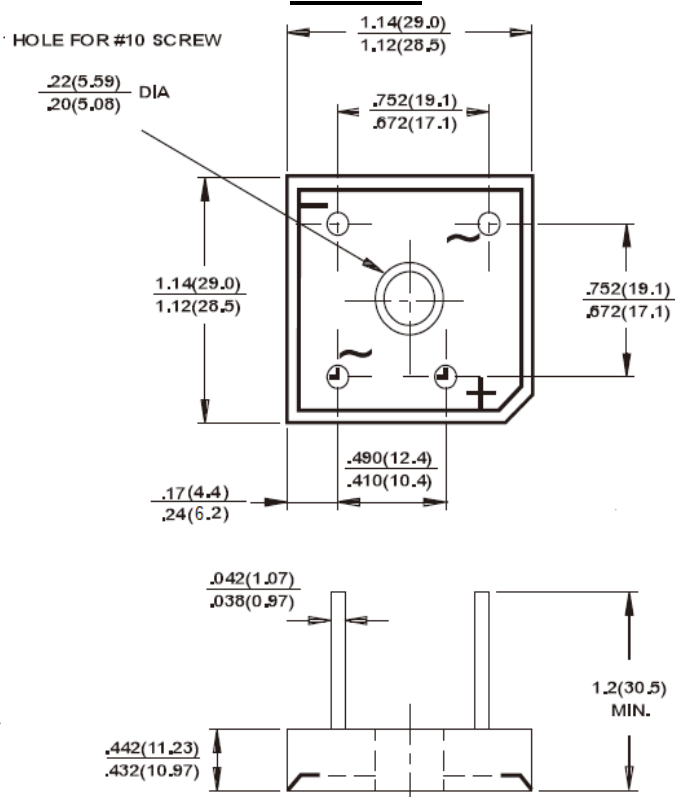

GBPC-M

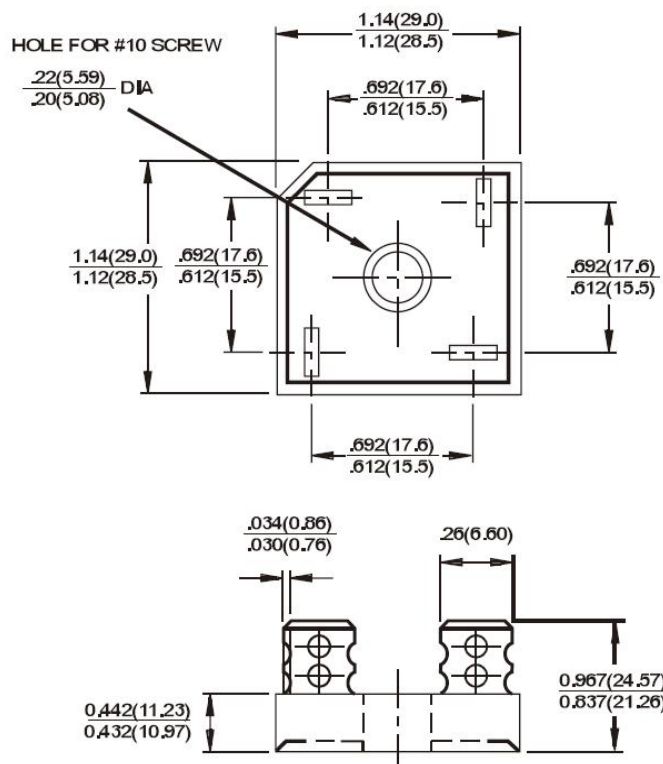

Dimensions in inches and (millimeters)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[GBPC2504](#) [GBPC2501](#) [GBPC2502](#) [GBPC2506](#) [GBPC2508](#) [GBPC2501W](#) [GBPC2502W](#) [GBPC2504W](#)
[GBPC2506W](#) [GBPC2508W](#) [GBPC2510W](#) [GBPC3501](#) [GBPC3502](#) [GBPC3504](#) [GBPC3506](#) [GBPC3508](#) [GBPC3510](#)
[GBPC3501W](#) [GBPC3502W](#) [GBPC3504W](#) [GBPC3506W](#) [GBPC3508W](#) [GBPC3510W](#) [GBPC15005](#) [GBPC15005M](#)
[GBPC15005W](#) [GBPC1501](#) [GBPC1501M](#) [GBPC1501W](#) [GBPC1502](#) [GBPC1502M](#) [GBPC1502W](#) [GBPC1504](#)
[GBPC1504M](#) [GBPC1504W](#) [GBPC1506](#) [GBPC1506M](#) [GBPC1506W](#) [GBPC1508](#) [GBPC1508M](#) [GBPC1508W](#)
[GBPC1510](#) [GBPC1510M](#) [GBPC1510W](#) [GBPC25005](#) [GBPC25005M](#) [GBPC25005W](#) [GBPC2501M](#) [GBPC2502M](#)
[GBPC2504M](#) [GBPC2506M](#) [GBPC2508M](#) [GBPC2510M](#) [GBPC35005M](#) [GBPC35005](#) [GBPC35005W](#) [GBPC3501M](#)
[GBPC3502M](#) [GBPC3504M](#) [GBPC3506M](#) [GBPC3508M](#) [GBPC3510M](#) [GBPC2510](#)