

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

70553-0050

Status:


Active

Overview:

SL™ Modular Connectors

Description:

2.54mm Pitch SL™ Header, Low Profile, Single Row, Right Angle, 3.05mm Pocket, Shrouded, 16 Circuits, Tin (Sn) Plating

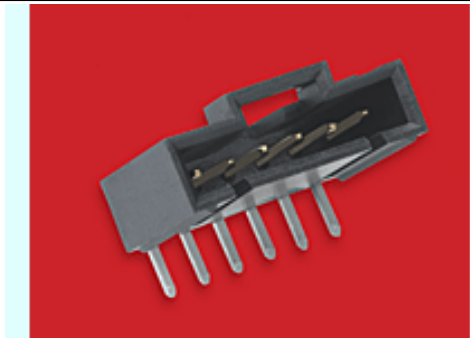

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-70400 \(PDF\)](#)
- [Product Specification PS-70541 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Headers

Series

70553

Application

Signal, Wire-to-Board

Overview

SL™ Modular Connectors

Product Name

SL™

UPC

800753764507

Physical

Breakaway

No

Circuits (Loaded)

16

Circuits (maximum)

16

Color - Resin

Black

Durability (mating cycles max)

25

Flammability

94V-0

Glow-Wire Compliant

No

Guide to Mating Part

Yes

Lock to Mating Part

Yes

Material - Metal

Brass, Phosphor Bronze

Material - Plating Mating

Tin

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

3.529/g

Number of Rows

1

Orientation

Right Angle

PC Tail Length

3.30mm

PCB Locator

No

PCB Retention

None

PCB Thickness - Recommended

1.60mm

Packaging Type

Tube

Pitch - Mating Interface

2.54mm

Plating min - Mating

3.810µm

Plating min - Termination

3.810µm

Polarized to Mating Part

Yes

Shrouded

Fully

Stackable

No

Temperature Range - Operating

-40°C to +105°C

Termination Interface: Style

Through Hole

Electrical

Current - Maximum per Contact

3A

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Low-Halogen Status

Not Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series  
70553Series

Mates With  
SL™ Crimp Housing 70066 Option N, 70066 Option G, 70430 Option G, 70400 Option G

|                   |      |
|-------------------|------|
| Voltage - Maximum | 250V |
|-------------------|------|

**Solder Process Data**

|                                                |                        |
|------------------------------------------------|------------------------|
| Duration at Max. Process Temperature (seconds) | 3                      |
| Lead-free Process Capability                   | Wave Capable (TH only) |
| Max. Cycles at Max. Process Temperature        | 1                      |
| Process Temperature max. C                     | 245                    |

**Material Info**

**Reference - Drawing Numbers**

|                       |                    |
|-----------------------|--------------------|
| Product Specification | PS-70400, PS-70541 |
| Sales Drawing         | SDA-70553-****     |

This document was generated on 10/08/2013

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[70553-0050](#)