

BMOD0063 P125 B14/B24/B04 BMOD0063 P125 B33



FEATURES AND BENEFITS

- CAN Bus digital monitoring and communications
- Highest power performance available
- Over 1,000,000 duty cycles
- Temperature and voltage monitoring
- Ultra-low internal resistance
- Shock and vibration immunity (ISO16750:T14, EN61373)

TYPICAL APPLICATIONS

- Buses
- Electric trains and trolleys
- Heavy duty transportation
- Cranes, RTGS
- Utility vehicles
- Mining Equipment

PRODUCT SPECIFICATIONS

CAPACITANCE	B04/B14/B24/B33
Nominal capacitance	63 F
Tolerance capacitance	+20% / -0%
VOLTAGE	
Rated voltage	125 V DC
Surge voltage	135 V DC
Maximum operating voltage	130 V DC
Isolation voltage 50Hz, 1 min. Maximum string operating voltage 1,500 V DC	4,000 V DC
RESISTANCE	
ESR, DC Max., room temperature	18 mΩ
Resistance tolerance	Max.
Thermal resistance (Rth)	0.032°C/W
TEMPERATURE	
Operating temperature range	-40°C to +65°C
Max. ambient operating temp.	+50°C
Storage temperature range	-40°C to +70°C
Temperature characteristics	
Capacitance change	± 5% at 25° C
Internal resistance change	± 150% at 25° C
POWER	
Pd	1,750 W/kg
Pmax	4,700 W/kg
ENERGY	
Emax	2.53 Wh/kg
Energy available Energy Available equals $1/2C (V_{nom}^2 - 1/2V_{nom}^2) / 3600$	101.7 Wh
CYCLES	
Cycles 125 V to 62.5 V DC, RT	1,000,000
Capacitance change Within % of initial specified value.	20% decrease
Internal resistance Within % of initial specified value.	100% increase

BMOD0063 P125 B14/B24/B04 **BMOD0063 P125 B33**




PRODUCT SPECIFICATIONS (cont.)

LIFESPAN		B04/B14/B24/B33
Lifetime 125 V DC, RT End of life characterized as -20% C from nominal C, or increase of 100% in ESR		100,000 hours
Endurance After 1,500 hours application of rated voltage at 65°C. Within % of initial specified value.		
Capacitance change		<20% decrease
Internal resistance change		<60% increase
Life test After 10 years at rated voltage and 25°C. Within % of initial specified value.		
Capacitance change		20% decrease
Internal resistance		100% increase
CURRENT		
Leakage current After 72 hours at 25°C. Initial leakage current can be higher.		5.2 mA
Maximum continuous current		150 A
Maximum peak current, 1 sec 1 second, 10% duty cycle		750 A
Maximum continuous current with fan cooling Assuming 15°C temperature rise above ambient temperature		150 A
Maximum continuous current with passive cooling Assuming 15°C temperature rise above ambient temperature		55 A
Self discharge % of initial V, 30 days RT 100V; 12 hours charge and hold		50%
CONNECTION		
Power terminal		Radsok®
Communications		See page 3
MONITORING		
Cell balancing		VMS (Maxwell Technologies® Voltage Management System)
Voltage and Temperature Monitoring		CANBus SAE J1939 (B14/B24/B04) Analog (B33)
SIZE		
Dimensions (L x W x H) (mm) (±0.5mm)		762 x 425 x 265 (B14/B24/B33) 619 x 425 x 265 (B04)
Weight		59.5 kg
RATINGS		
Fan power Max. each fan		12V / 42W (B14) 24V / 55W (B24/B33) No Fan (B04)
Environmental Protection		IP65; IP55 (fans)
Shock resistance		SAE J2464
Vibration resistance		EN 61373; ISO16750 Table 14

BMOD0063 P125 B14/B24/B04
BMOD0063 P125 B33



DIMENSIONS (mm)

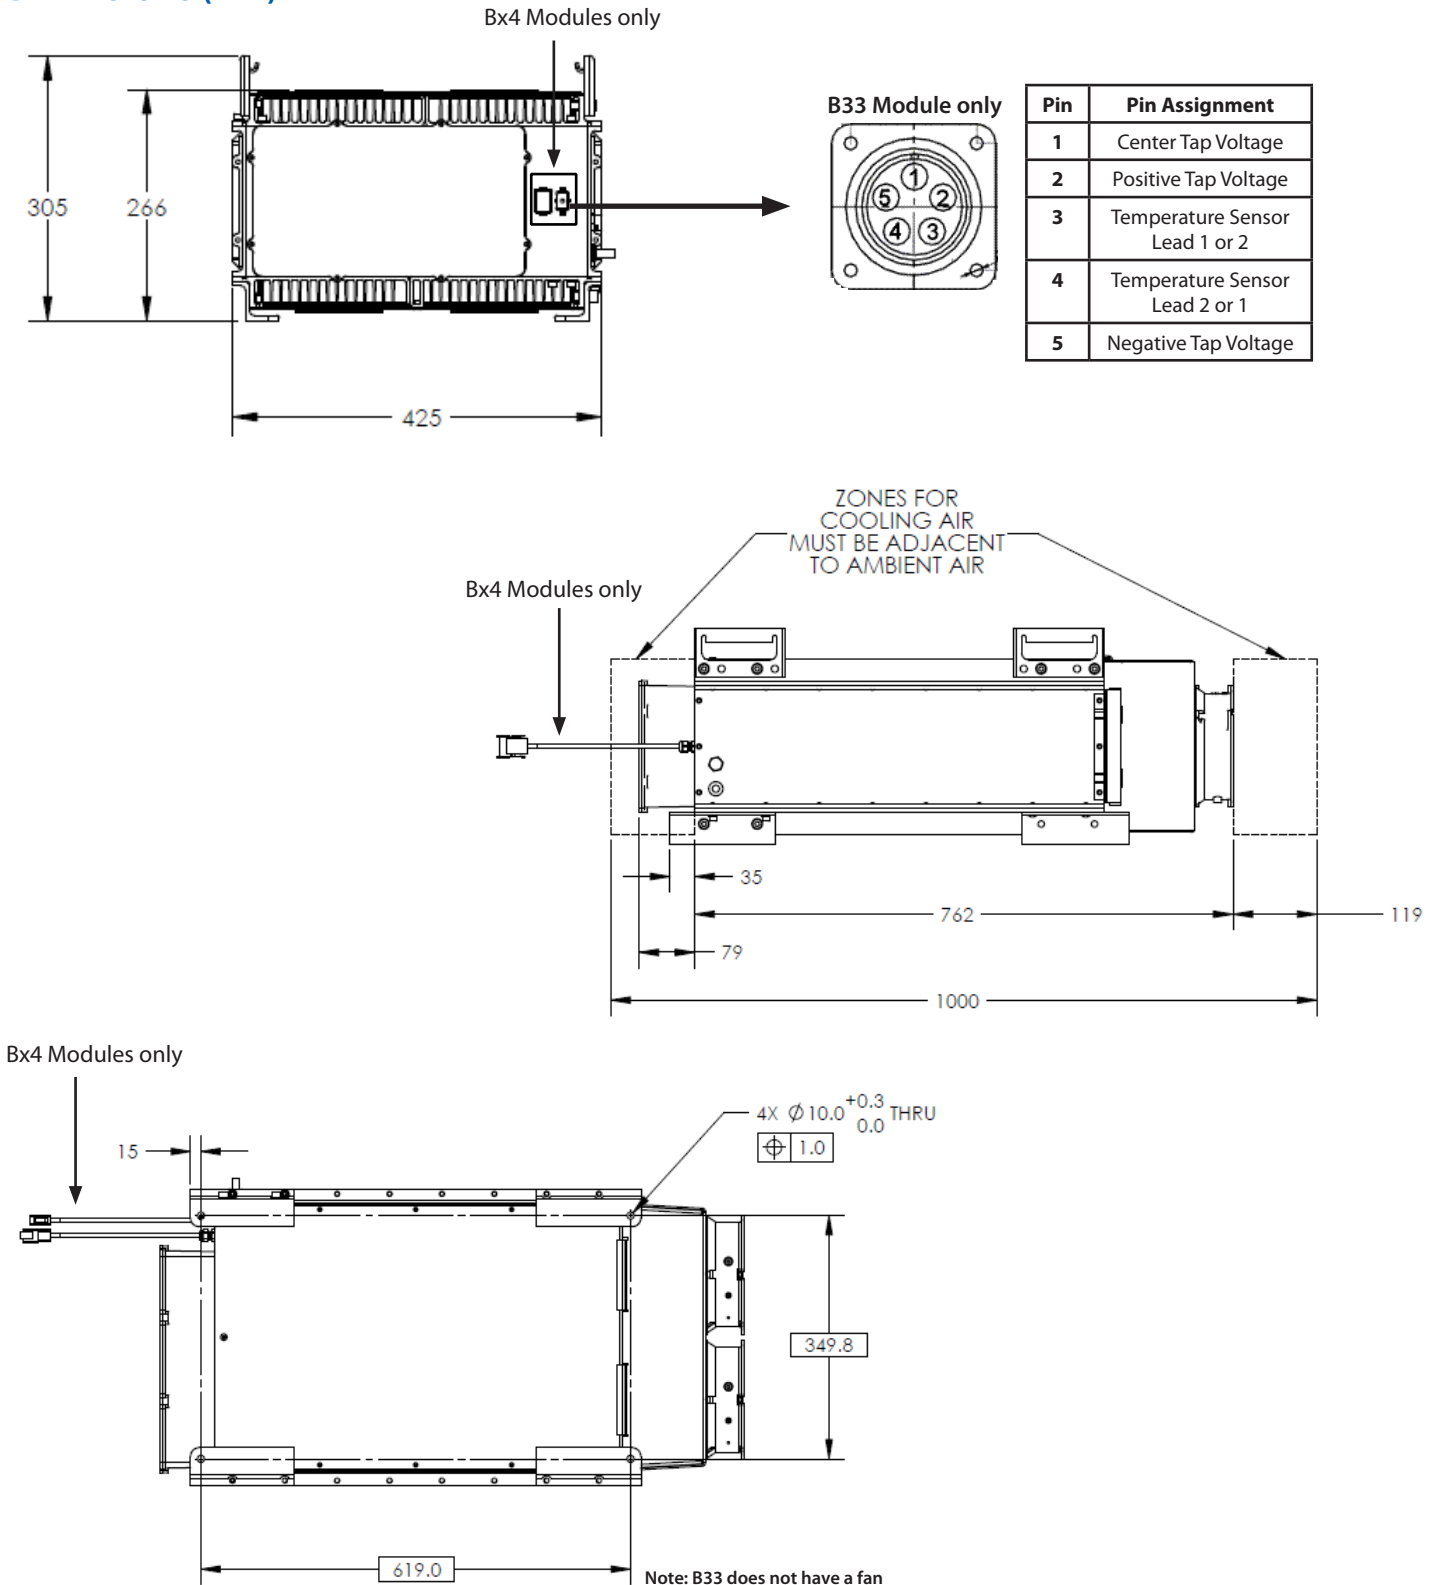

Product dimensions are for reference only unless otherwise identified. Product dimensions and specifications may change without notice.
 Please contact Maxwell Technologies directly for any technical specifications critical to application. Drawing no. 1014553

BMOD0063 P125 B14/B24/B04 BMOD0063 P125 B33



INCLUDED IN BMOD0063 P125

2 Power connectors:

- Mounting adapters with isolation and mating lug connectors
- Adapters for normal or perpendicular mounting of power cables (AWG 1/0)

1 CAN bus serial communications connector, male, Deutsch DTM04-08PA with WM-8D and 0462-201-20141 (B04/B14/B24)

1 CAN bus serial communications connector, female, Deutsch DTM06-08SA with WM-8S and 0460-201-20141 (B04/B14/B24)

1 ANALOG, 5 pin connector (B33)

MOUNTING RECOMMENDATIONS

The module should be mounted to a strong chassis surface with four M8 screws of appropriate length for the application. The mounting screws should have a mechanical locking method that is appropriate for the vibration levels. To provide the best possible EMI protection, the mounting surface should be electrically grounded. Do not reverse polarize.

The use of alternate module mounting orientations or custom feet other than those provided by Maxwell Technologies will result in voiding the warranty unless such uses have been disclosed to Maxwell and approved by Maxwell by express written consent prior to implementation.

MARKINGS

Modules are marked with the following information: Rated capacitance, rated voltage, product number, name of manufacturer, positive and negative terminal, warning marking, serial number.



Maxwell Technologies, Inc.
Worldwide Headquarters
9244 Balboa Avenue
San Diego, CA 92123
USA
Tel: +1 858 503 3300
US Free Call: +1 877 511 4324
Fax: +1 858 503 3301



Maxwell Technologies SA
CH-1728 Rossens
Switzerland
Tel: +41 (0)26 411 85 00
Fax: +41 (0)26 411 85 05



Maxwell Technologies, GmbH
Brucker Strasse 21
D-82205 Gilching
Germany
T: +49 (0)8105 24 16 10
F: +49 (0)8105 24 16 19



Maxwell Technologies, Inc.
Shanghai Representative Office
Rm.2104, Suncome Liauw's Plaza
738 Shang Cheng Road, Pudong New Area
Shanghai 200120, P.R. China
Tel: +86 21 5836 5733
Fax: +86 21 5836 5620

Online: www.maxwell.com • Email: info@maxwell.com