

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0877592675](#)
Status: **Active**
Overview: [milligrid](#)
Description: 2.00mm (.079") Pitch Milli-Grid™ Header, Surface Mount, Vertical, 26 Circuits, 0.76µm (30µ") Gold (Au) Selective Plating, without Press-fit Plastic Pegs, with Pick-and-Place Cap, Tape and Reel Packaging, Lead-free

Documents:

3D Model	Product Specification PS-87761-100 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

UL	E29179
----	--------

General

Product Family	PCB Headers
Series	87759
Application	Board-to-Board
Overview	milligrid
Product Name	Milli-Grid™

Physical

Breakaway	Yes
Circuits (Loaded)	26
Circuits (maximum)	26
Color - Resin	Black
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Mated Height (in)	0.150 In
Mated Height (mm)	3.80 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface (in)	0.079 In
Pitch - Mating Interface (mm)	2.00 mm
Pitch - Term. Interface (in)	0.079 In
Pitch - Term. Interface (mm)	2.00 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.76
Polarized to Mating Part	No
Polarized to PCB	No
Robotic Placement	Pick and Place Cap
Shrouded	No
Stackable	Yes
Temperature Range - Operating	-55°C to +105°C




image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[87759Series](#)

Mates With
[79107](#) Milli-Grid™ Receptacle, Vertical,
Through Hole. [79108](#) Milli-Grid™ Flex-to-
Board, Vertical Receptacle. Milli-Grid™
Receptacle, Surface Mount. [79109](#). [87381](#)

Termination Interface: Style	Surface Mount
------------------------------	---------------

Electrical

Current - Maximum per Contact	2A
Voltage - Maximum	125V

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-89990-485
Product Specification	PS-87761-100
Sales Drawing	SD-87759-118

This document was generated on 05/25/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F






E

D

C

B

A

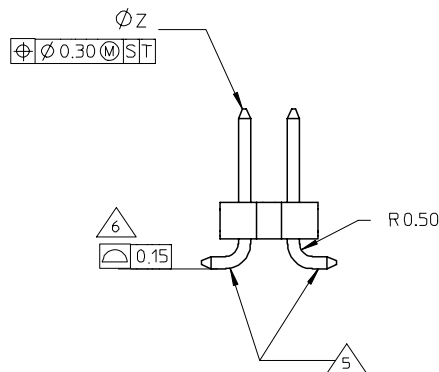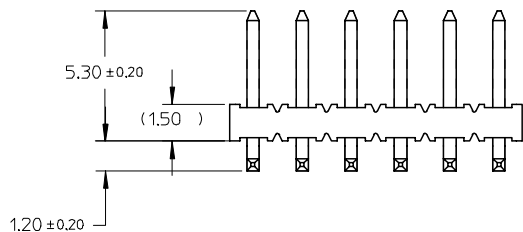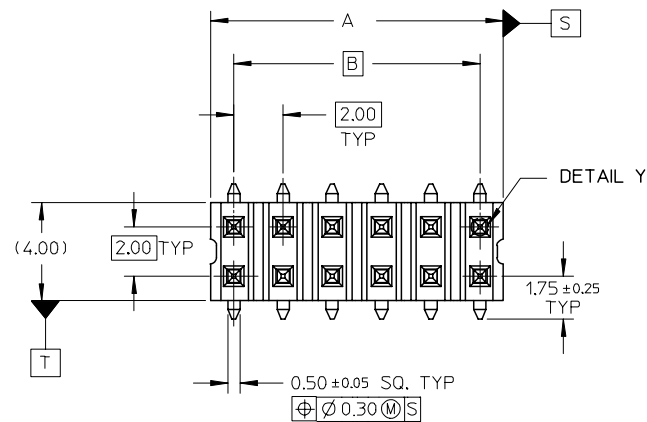

DETAIL Y

NOTE:

1. MATERIAL:
HSG & CAP - LCP,
UL 94V-0, COLOUR BLACK

PIN - 0.50 SQ PHOSPHOR BRONZE

2. PLATING:
0.76um MIN GOLD PLATE AT CONTACT AREA,
TIN PLATE AT SOLDER AREA,
BOTH OVER NICKEL UNDERPLATE

3. PIN PUSHOUT FORCE: 1KG MIN IN EITHER DIRECTION

4. PRODUCT SPEC PS-87761-100 APPLIES.

5. BEND DEPRESSION IS ACCEPTABLE SO LONG AS IT DOES NOT AFFECT THE OVERALL COPLANARITY OF TAIL.

6. COPLANARITY IS TO BE MEASURED BY RESTING THE SOLDER TAIL ON A FLAT SURFACE.

7. CAP TO BE LOCATED AS CENTRAL OF PART AS POSSIBLE
TOP SURFACE OF CAP TO BE FLAT FOR THE PURPOSE OF PICK & PLACE BY VACUUM SUCTION NOZZLE.

8. FOR ILLUSTRATION PURPOSES, 12CKT IS SHOWN.

9. CKT 4 & 6 IS CUT FROM CKT 8 & 12 RESPECTIVELY
ROUGH EDGES ARE EXPECTED ALONG THE CUTTING EDGES.

10. PART TO BE PACKED IN TRAY 10 ONLY.

11. TUBE LENGTH IS 560MM REF STANDARD.

REV	DESCRIPTION
B	REVISED TUBE SPEC EC NO: S2007-0829 DRWN:SKL/M01 2007/04/10 CHKD:CLAM 2007/04/12 APPR:KWLEE 2007/04/17


QUALITY SYMBOLS
▽=0
▽C=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm
4 PLACES	± 0.2
3 PLACES	± 0.15
2 PLACES	± 0.1
1 PLACE	± 0.05
ANGULAR ± 3 °	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
KSEE	2003/12/17
CHECKED BY	DATE
KCLING	2004/01/12
APPROVED BY	DATE
SKTOH	2004/01/12
MATERIAL NO.	
SEE TABLE	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
NTS	METRIC	
TITLE MGRID, 2MM DUAL ROW HEADER, SMT		
MOLEX INCORPORATED		
DOCUMENT NO. SD-87759-118		SHEET NO. 1 OF 4

9 8 7 6 5 4 3 2 1

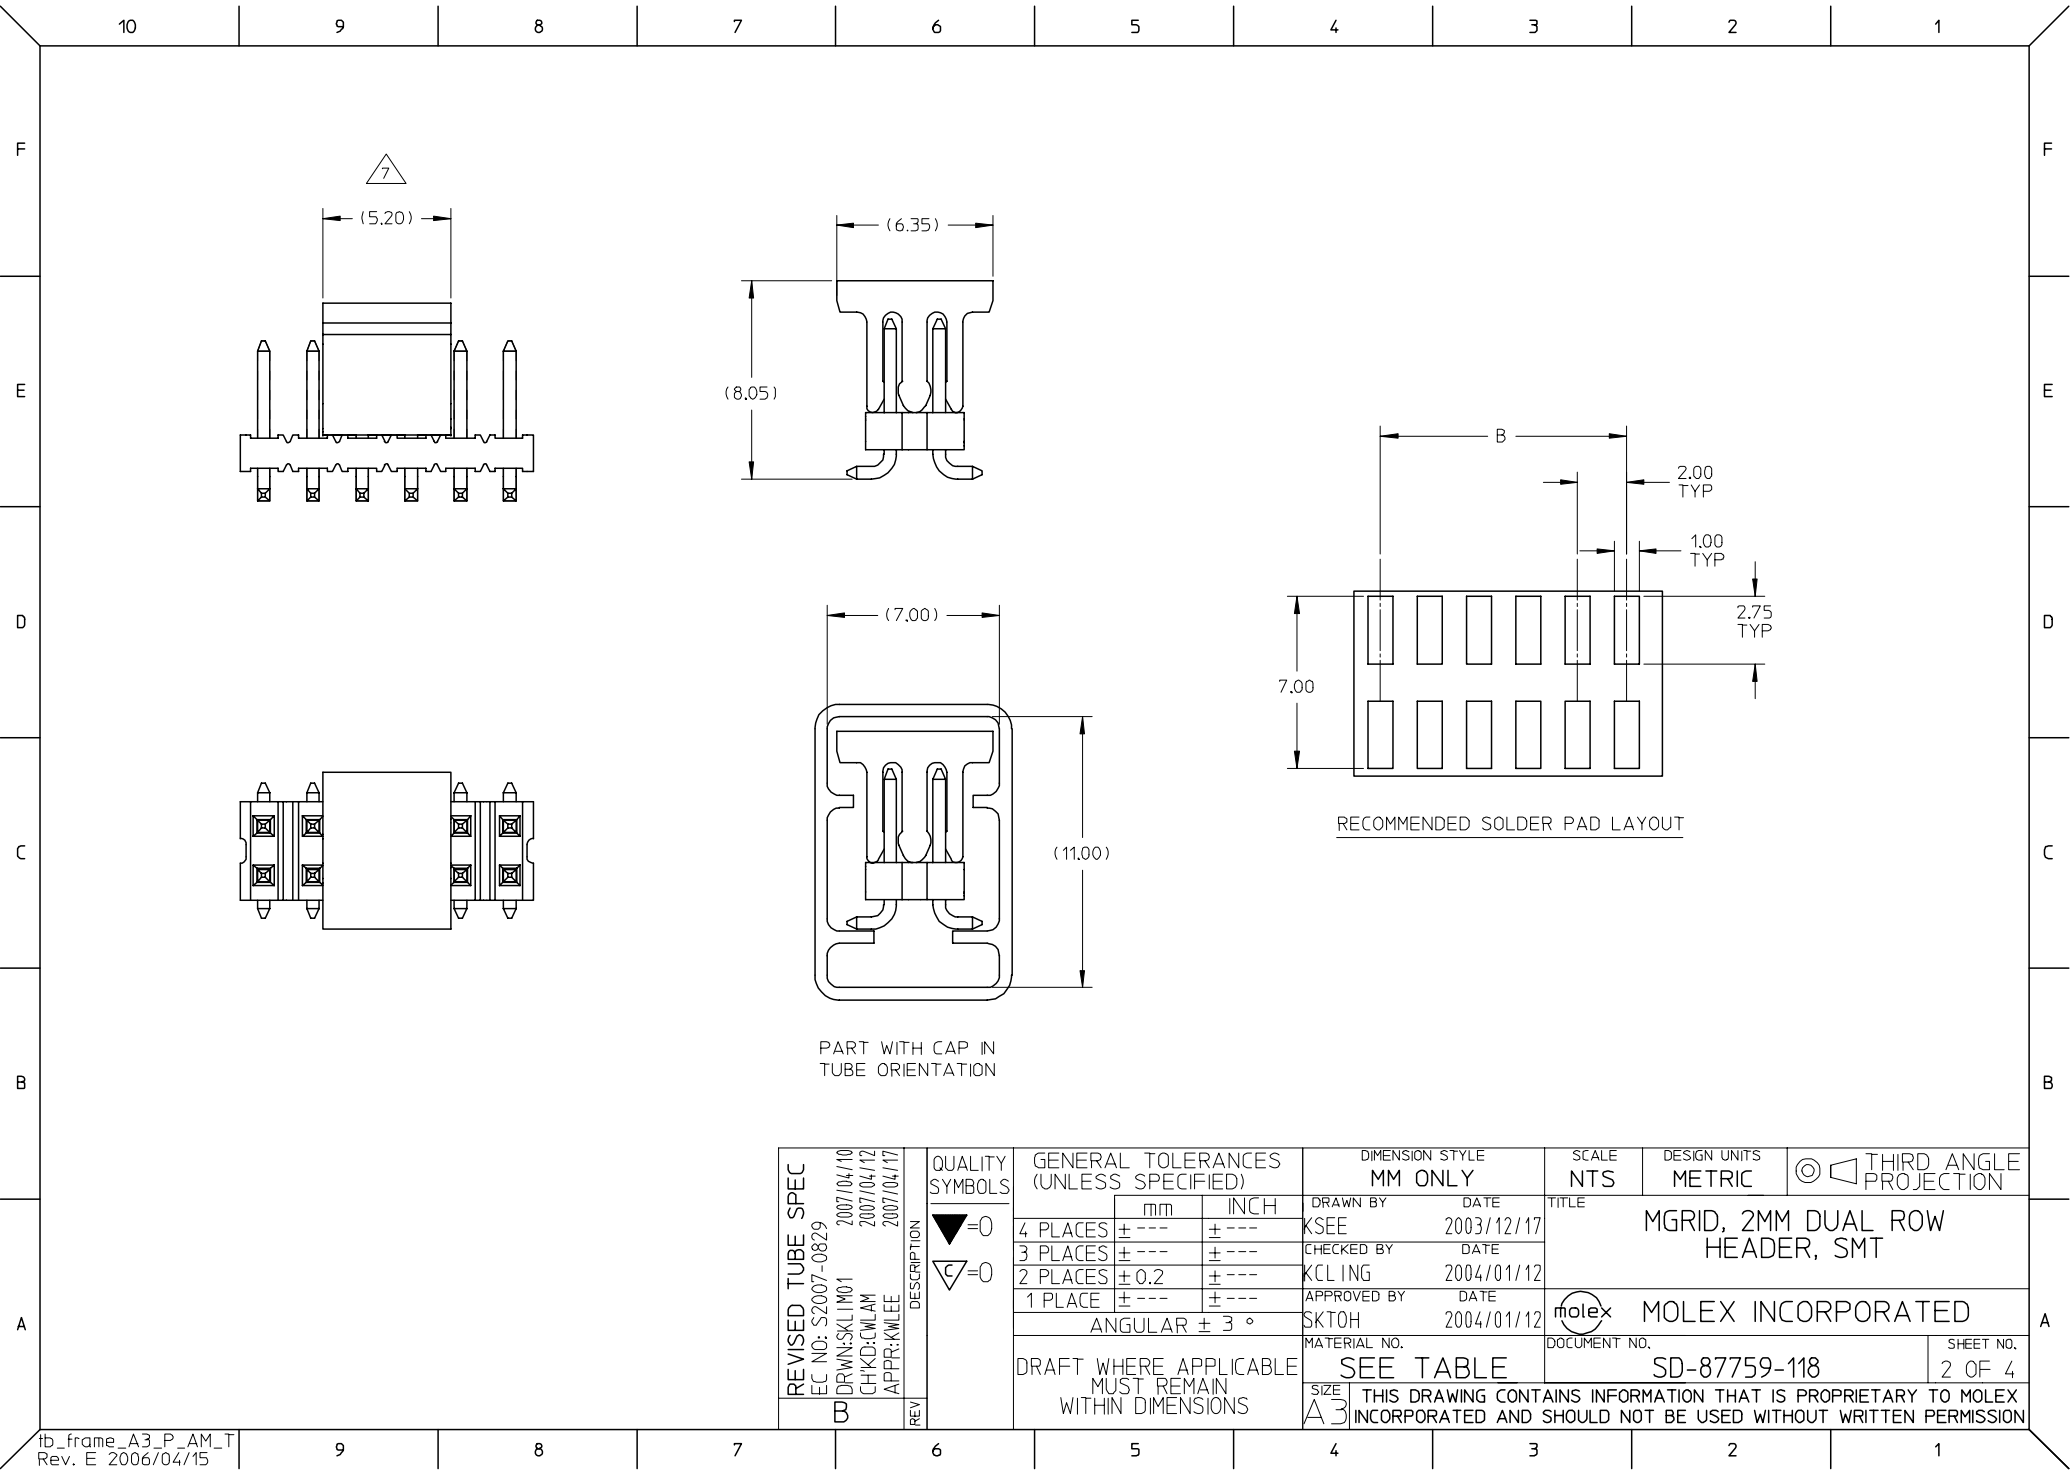

PART WITH CAP IN
TUBE ORIENTATION

RECOMMENDED SOLDER PAD LAYOUT

REVISED TUBE SPEC EC NO: S2007-0829 DRWN:SKL/M01 2007/04/10 CHKD:CLW/LAM 2007/04/12 APPR:KWLEE 2007/04/17		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
					mm	INCH	DRAWN BY KSEE	DATE 2003/12/17	TITLE MGRID, 2MM DUAL ROW HEADER, SMT			
				4 PLACES	± ---	± ---	CHECKED BY	DATE				
				3 PLACES	± ---	± ---	KCL ING	2004/01/12				
				2 PLACES	± 0.2	± ---	APPROVED BY	DATE	MOLEX INCORPORATED			
				1 PLACE	± ---	± ---	SKT0H	2004/01/12				
		ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-87759-118		2 OF 4						
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

	10	9	8	7	6	5	4	3	2	1																																																						
F	PART NUMBER WITHOUT CAP IN TUBE	PART NUMBER WITH CAP IN TUBE	PART NUMBER WITH CAP IN TAPE AND REEL.	CKT SIZE	A	B	Bo	F	So	W	EMBOSSED TYPE	F																																																				
	87759-0415  	87759-0465	87759-0475	4	NA	2.00	5.40	11.50	-	24.00	C																																																					
	87759-0615 	87759-0665	87759-0675	6	NA	4.00	7.20	11.50	-	24.00	C																																																					
E	87759-0815	87759-0865	87759-0875	8	7.90	6.00	8.20	11.50	-	24.00	C	E																																																				
	87759-1015	87759-1065	87759-1075	10	9.90	8.00	10.20	11.50	-	24.00	A																																																					
	87759-1215	87759-1265	87759-1275	12	11.90	10.00	12.20	11.50	-	24.00	A																																																					
D	87759-1415	87759-1465	87759-1475	14	13.90	12.00	14.20	11.50	-	24.00	A	D																																																				
	87759-1615	87759-1665	87759-1675	16	15.90	14.00	16.20	14.20	28.40	32.00	B																																																					
	87759-1815	87759-1865	87759-1875	18	17.90	16.00	18.20	14.20	28.40	32.00	B																																																					
C	87759-2015	87759-2065	87759-2075	20	19.90	18.00	20.20	14.20	28.40	32.00	B	C																																																				
	87759-2215	87759-2265	87759-2275	22	21.90	20.00	22.20	20.20	40.40	44.00	B																																																					
	87759-2415	87759-2465	87759-2475	24	23.90	22.00	24.20	20.20	40.40	44.00	B																																																					
B	87759-2615	87759-2665	87759-2675	26	25.90	24.00	26.20	20.20	40.40	44.00	B	B																																																				
	87759-2815	87759-2865	87759-2875	28	27.90	26.00	28.20	20.20	40.40	44.00	B																																																					
	87759-3015	87759-3065	87759-3075	30	29.90	28.00	30.20	20.20	40.40	44.00	B																																																					
A	87759-3215	87759-3265	87759-3275	32	31.90	30.00	32.20	20.20	40.40	44.00	B	A																																																				
	87759-3415	87759-3465	87759-3475	34	33.90	32.00	34.20	26.20	52.40	56.00	B																																																					
	87759-3615	87759-3665	87759-3675	36	35.90	34.00	36.20	26.20	52.40	56.00	B																																																					
B	87759-3815	87759-3865	87759-3875	38	37.90	36.00	38.20	26.20	52.40	56.00	B	B																																																				
	87759-4015	87759-4065	87759-4075	40	39.90	38.00	40.20	26.20	52.40	56.00	B																																																					
	87759-4215	87759-4265	87759-4275	42	41.90	40.00	42.20	26.20	52.40	56.00	B																																																					
A	87759-4415	87759-4465	87759-4475	44	43.90	42.00	44.20	26.20	52.40	56.00	B	A																																																				
	87759-4615	87759-4665	87759-4675	46	45.90	44.00	46.20	26.20	52.40	56.00	B																																																					
	87759-4815	87759-4865	87759-4875	48	47.90	46.00	48.20	26.20	52.40	56.00	B																																																					
B	87759-5015	87759-5065	87759-5075	50	49.90	48.00	50.20	34.20	68.40	72.00	B	B																																																				
A												A																																																				
<table><tr><td rowspan="4">REVISED TUBE SPEC EC NO: S2007-0829 DRWN:SKLIM01 2007/04/10 CHKD:CWLAM 2007/04/12 APPR:KWLEE 2007/04/17 B</td><td rowspan="4">DESCRIPTION REV</td><td rowspan="4">QUALITY SYMBOLS ▽=0 ▽C=0</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="2">DIMENSION STYLE MM ONLY</td><td>SCALE NTS</td><td>DESIGN UNITS METRIC</td><td colspan="2">THIRD ANGLE PROJECTION</td></tr><tr><td></td><td>mm</td><td>INCH</td><td>DRAWN BY KSEE</td><td>DATE 2003/12/17</td><td colspan="2" rowspan="2">TITLE MGRID, 2MM DUAL ROW HEADER, SMT</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td><td>CHECKED BY KCLING</td><td>DATE 2004/01/12</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± ---</td><td>APPROVED BY SKTOH</td><td>DATE 2004/01/12</td><td colspan="2">molex MOLEX INCORPORATED</td></tr><tr><td colspan="3">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td colspan="2">ANGULAR ± 3 °</td><td colspan="2">MATERIAL NO. SEE TABLE</td><td colspan="2">DOCUMENT NO. SD-87759-118</td><td colspan="2">SHEET NO. 4 OF 4</td></tr><tr><td colspan="3"></td><td colspan="2"></td><td colspan="2">SIZE A3</td><td colspan="5">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr></table>												REVISED TUBE SPEC EC NO: S2007-0829 DRWN:SKLIM01 2007/04/10 CHKD:CWLAM 2007/04/12 APPR:KWLEE 2007/04/17 B	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			mm	INCH	DRAWN BY KSEE	DATE 2003/12/17	TITLE MGRID, 2MM DUAL ROW HEADER, SMT		4 PLACES	± ---	± ---	CHECKED BY KCLING	DATE 2004/01/12	3 PLACES	± ---	± ---	APPROVED BY SKTOH	DATE 2004/01/12	molex MOLEX INCORPORATED		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			ANGULAR ± 3 °		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-87759-118		SHEET NO. 4 OF 4							SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
REVISED TUBE SPEC EC NO: S2007-0829 DRWN:SKLIM01 2007/04/10 CHKD:CWLAM 2007/04/12 APPR:KWLEE 2007/04/17 B	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																																																							
				mm	INCH	DRAWN BY KSEE	DATE 2003/12/17	TITLE MGRID, 2MM DUAL ROW HEADER, SMT																																																								
			4 PLACES	± ---	± ---	CHECKED BY KCLING	DATE 2004/01/12																																																									
			3 PLACES	± ---	± ---	APPROVED BY SKTOH	DATE 2004/01/12	molex MOLEX INCORPORATED																																																								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			ANGULAR ± 3 °		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-87759-118		SHEET NO. 4 OF 4																																																							
					SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																									
ib_frame_A3_P_AM_T Rev. E 2006/04/15	9	8	7	6	5	4	3	2	1																																																							