

P6DG-XXXXE 1KV ISOLATED 1 W REGULATED SINGLE OUTPUT DIP14

Available Inputs: 5, 12 and 24 VDC

Available Outputs: 3.0, 3.3, 5, 9, 12 and 15 VDC

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range	+/- 10 %
Filter	Capacitors

Isolation Specifications

Rated voltage	1000 VDC
Resistance	10^9 Ohm
Capacitance	60 pF typ.

Output Specifications

Voltage accuracy	+/- 2 %
Ripple and noise (at 20 MHz BW)	50 mV p-p, max.
Short circuit protection	Short term
Line voltage regulation	+/- 0,5 % max. (3.3 VDC output +/- 1% max.)
Load voltage regulation	+/- 0,5 % typ., +/- 1 % max. (no load/full load)
Temperature coefficient	+/- 0,02 % / °C

General Specifications

Efficiency	58 % to 66 %
Switching frequency	70 KHz, typ.

Environmental Specifications

Operating temperature (ambient)	- 40° C to + 85° C
Storage temperature	- 55 °C to + 125 °C
Derating	See graph
Humidity	Up to 90 %, non condensing
Cooling	Free air convection


Physical Characteristics

Dimensions DIP	20,32 x 10,16 x 6,88 mm 0,80 x 0,40 x 0,27 inches
Weight	2,0 g
Case material	Non conductive black plastic

Examples of Partnumbers/Modelcode


PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P6DG-0503E	5	20	200	3	200	60
P6DG-053R3E	5	22	220	3,3	200	60
P6DG-054R8E	5	25	318	4,85	200	61
P6DG-0505E	5	28	312	5	200	63
P6DG-0509E	5	32	312	9	111	64
P6DG-0512E	5	45	312	12	84	64
P6DG-1203E	12	15	83	3	200	60
P6DG-123R3E	12	15	92	3,3	200	60
P6DG-124R8E	12	15	133	4,85	200	61
P6DG-1205E	12	16	130	5	200	64
P6DG-1209E	12	16	123	9	111	68
P6DG-1212E	12	22	123	12	84	68
P6DG-2403E	24	8	43	3	200	58
P6DG-243R3E	24	8	47	3,3	200	58
P6DG-244R8E	24	7	64	4,85	200	63
P6DG-2405E	24	7	64	5	200	65
P6DG-2409E	24	10	63	9	111	66
P6DG-2412E	24	10	63	12	84	66

Dimensions

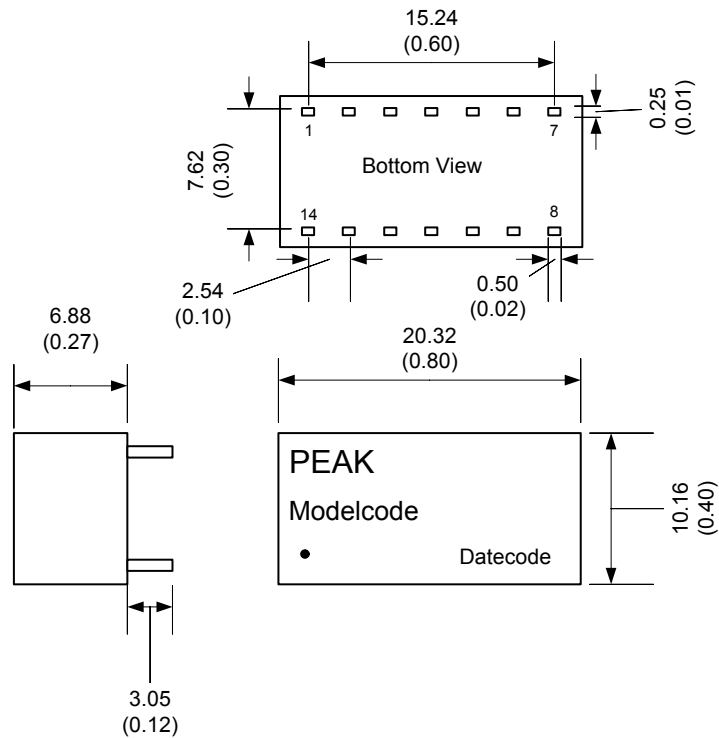

All dimensions are typical in millimeters (inches).
Tolerance x.xx = +/- 0.30 (+/- 0.01)
Specification may change without notice.
Pin length is typical.

Derating Graph and Pinning

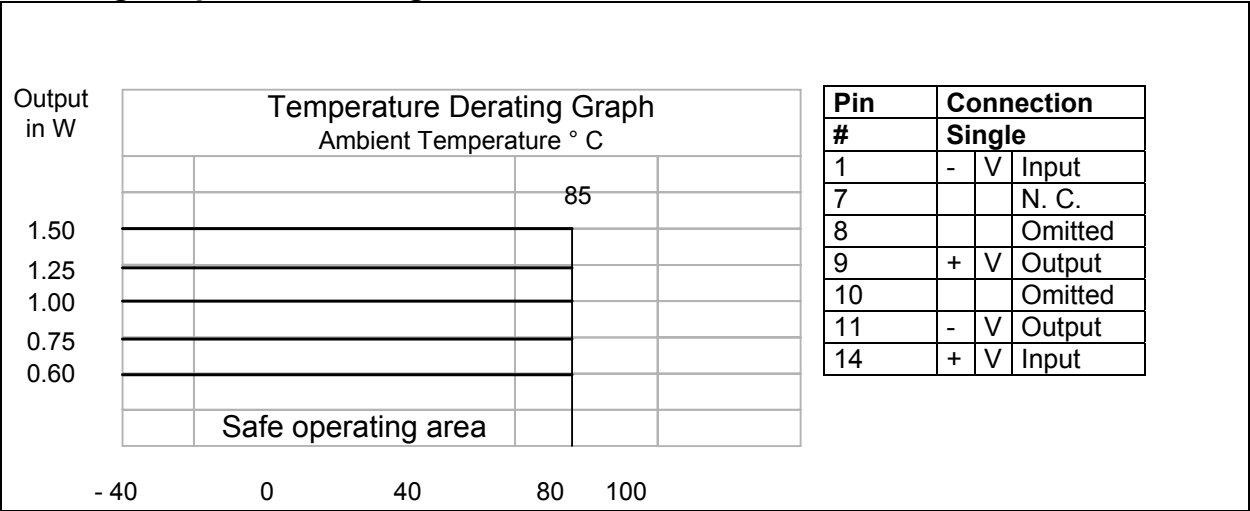

If specification prior to this data sheet is needed, please enquire.

Specification can be changed without notice.
REV:A / 06.2003

Copyright PEAK electronics GmbH