




Micro-D Metal Shell MWDM Uninsulated Wire Pigtails

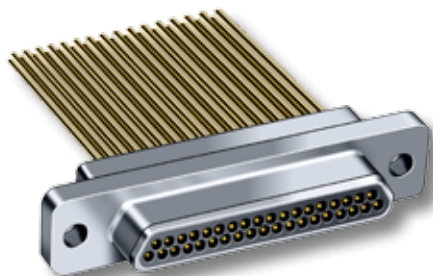

Micro-D Uninsulated Pigtails—These connectors feature gold-plated TwistPin contacts and mil spec crimp termination to gold-plated single strand copper wire. Suitable for soldering or splicing applications, the wire leads can be ordered either gold-plated or solder-dipped.

New One-Piece Socket Contact—An “integral tail” socket contact is now standard on all socket connectors ordered with 24 AWG or 25 AWG, up to one inch of wire. This phos bronze contact eliminates the crimp joint and offers greater rigidity.

HOW TO ORDER METAL SHELL PIGTAILS, UNINSULATED WIRE MICRO-D CONNECTORS

Series	Shell Material and Finish	Insulator Material	Contact Layout	Contact Type	Wire Gage (AWG)	Wire Type	Wire Finish	Wire Length Inches	Hardware	
MWDM	Aluminum Shell	L – LCP		P – Pin	4 – #24 (.020")	C – Single Strand Copper	3 – Solder-Dipped	.125	B	
	1 – Cadmium		9	S – Socket	5 – #25 (.018")		4 – Gold	.250	P	
	2 – Nickel	30% Glass-Filled Liquid Crystal Polymer	15		6 – #26 (.016")			.375	M	
	4 – Black Anodize		21				.500	M1		
			25				.750	S		
	5 – Gold		31				1.000	S1		
	6 – Chem Film		37				2.000	L		
			51						Wire Length In Inches. ".500" Specifies Half Inch.	K
	Stainless Steel Shell		51-2						F	
			67						R	
	3 – Passivated		69						H	
			100							
Sample Part Number										
MWDM	2	L –	37	P –	5	C	4 –	.250	M	

MOUNTING HARDWARE

B	P	M	M1	S	S1	L	K	F	R	H
Thru-Hole	Jackpost	Hex Head Jackscrew	Hex Head Jackscrew, Extended	Slot Head Jackscrew	Slot Head Jackscrew, Extended	Hex Head Jackscrew Non-Removable	Slot Head Jackscrew Non-Removable Extended	Float Mount For Front Panel Mounting	Float Mount For Rear Panel Mounting	Threaded Insert

Micro-D Metal Shell MWDM Uninsulated Wire Pigtails




Micro-D
Harness

PERFORMANCE SPECIFICATIONS

Current Rating	3 AMP
DWV	600 VAC Sea level
Insulation Resistance	5000 Megohms Minimum
Contact Resistance	8 Milliohms Maximum
Low Level Contact Resist.	32 Milliohms Maximum
Magnetic Permeability	2 μ Maximum
Operating Temperature	-55° C. to +150° C.
Shock, Vibration	50 g., 20g.
Mating Force	(10 Ounces) X (# of Contacts)

MATERIALS AND FINISHES

Connector Shell	Aluminum Alloy 6061 or Stainless Steel, 300 Series, passivated. See Ordering Info for Plating Options
Insulator	Liquid Crystal Polymer (LCP)
Interfacial Seal	Fluorosilicone Rubber, Blue
Pin Contact	Copper Alloy, _ Gold over Nickel Plating
Socket Contact	Copper Alloy, Gold Over Nickel Plating
Hardware	300 Series Stainless Steel
Encapsulant	Epoxy Resin Hysol EE4215

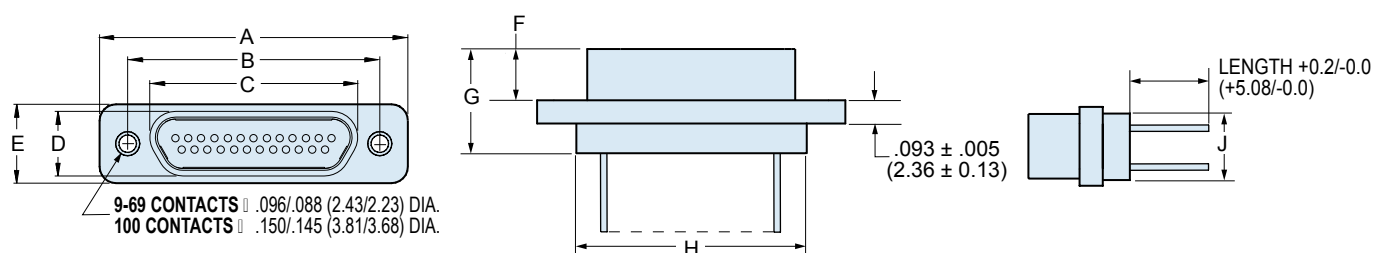

DIMENSIONS

Layout	A Max.		B		C Max.		D Max.		E Max.		F		G Max.		H Max.		J Max.	
	In.	mm.	In. $\pm .003$	mm. ± 0.08	In.	mm.	In.	mm.	In.	mm.	In. $\pm .003$	mm. ± 0.08	In.	mm.	In.	mm.	In.	mm.
9P	.785	19.94	.565	14.35	.333	8.46	.184	4.67	.308	7.82	.183	4.65	.416	10.57	.400	10.16	.270	6.86
9S	.785	19.94	.565	14.35	.400	10.16	.250	6.35	.308	7.82	.195	4.95	.429	10.90	.400	10.16	.270	6.86
15P	.935	23.75	.715	18.16	.483	12.27	.184	4.67	.308	7.82	.183	4.65	.416	10.57	.550	13.97	.270	6.86
15S	.935	23.75	.715	18.16	.551	14.00	.250	6.35	.308	7.82	.195	4.95	.429	10.90	.550	13.97	.270	6.86
21P	1.085	27.56	.865	21.97	.633	16.08	.184	4.67	.308	7.82	.183	4.65	.416	10.57	.700	17.78	.270	6.86
21S	1.085	27.56	.865	21.97	.701	17.81	.250	6.35	.308	7.82	.195	4.95	.429	10.90	.700	17.78	.270	6.86
25P	1.185	30.01	.965	24.51	.733	18.62	.184	4.67	.308	7.82	.183	4.65	.416	10.57	.800	20.32	.270	6.86
25S	1.185	30.01	.965	24.51	.801	20.35	.250	6.35	.308	7.82	.195	4.95	.429	10.90	.800	20.32	.270	6.86
31P	1.335	33.91	1.115	28.32	.883	22.43	.184	4.67	.308	7.82	.183	4.65	.416	10.57	.950	24.13	.270	6.86
31S	1.335	33.91	1.115	28.32	.951	24.16	.250	6.35	.308	7.82	.195	4.95	.429	10.90	.950	24.13	.270	6.86
37P	1.485	37.72	1.265	32.13	1.033	26.24	.184	4.67	.308	7.82	.183	4.65	.416	10.57	1.100	27.94	.270	6.86
37S	1.485	37.72	1.265	32.13	1.101	27.96	.250	6.35	.308	7.82	.195	4.95	.429	10.90	1.100	27.94	.270	6.86
51P	1.435	36.45	1.215	30.86	.983	24.97	.228	5.79	.351	8.92	.183	4.65	.416	10.57	1.050	26.67	.310	7.87
51S	1.435	36.45	1.215	30.86	1.051	26.70	.296	7.52	.351	8.92	.195	4.95	.429	10.90	1.050	26.67	.310	7.87
51-2P	1.835	46.61	1.615	41.02	1.384	35.15	.184	4.67	.308	7.82	.183	4.65	.416	10.57	1.450	36.83	.270	6.86
51-2S	1.835	46.61	1.615	41.02	1.450	36.83	.250	6.35	.308	7.82	.195	4.95	.429	10.90	1.450	36.83	.270	6.86
67P	2.235	56.77	2.015	51.18	1.784	45.31	.184	4.67	.310	7.87	.183	4.65	.416	10.57	1.850	36.83	.270	6.86
67S	2.235	56.77	2.015	51.18	1.850	46.99	.250	6.35	.310	7.87	.195	4.95	.429	10.90	1.850	36.83	.270	6.86
69P	1.735	44.07	1.515	38.48	1.284	32.61	.228	5.79	.351	8.92	.183	4.65	.416	10.57	1.350	34.29	.310	7.87
69S	1.735	44.07	1.515	38.48	1.350	34.29	.296	7.52	.351	8.92	.195	4.95	.429	10.90	1.350	34.29	.310	7.87
100P	2.170	55.12	1.800	45.72	1.383	35.13	.270	6.86	.394	10.01	.183	4.65	.416	10.57	1.442	36.63	.360	9.14
100S	2.170	55.12	1.800	45.72	1.451	36.86	.333	8.46	.394	10.01	.195	4.95	.429	10.90	1.442	36.63	.360	9.14

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[MWDM2L-21P-5C4-.500P](#) [MWDM2L-21S-6C4-.500B](#) [MWDM2L-25S-6C4-.500P](#) [MWDM2L-37S-6C4-.500P](#)
[MWDM5L-25P-4C4-.125P](#) [MWDM6L-15S-5C4-.110P](#) [MWDM1L-21P-5C4-.125B](#) [MWDM1L-21P-5C4-.500L](#)
[MWDM1L-21P-5C4-1.000B](#) [MWDM1L-21P-5C4-1.000M](#) [MWDM1L-21P-5C4-7.000B](#) [MWDM1L-21P-6C4-.500B](#)
[MWDM1L-21P-6C4-.500S](#) [MWDM1L-21S-5C4-.500F](#) [MWDM1L-21S-5C4-1.000B](#) [MWDM1L-25P-5C4-.093L](#)
[MWDM1L-25P-5C4-.500F](#) [MWDM1L-25P-5C4-.500P](#) [MWDM1L-25P-5C4-.500S1](#) [MWDM1L-25P-5C4-1.000B](#)
[MWDM1L-25P-5C4-1.000F](#) [MWDM1L-25P-5C4-1.000M](#) [MWDM1L-25P-5C4-1.000P](#) [MWDM1L-25P-5C4-2.000B](#)
[MWDM1L-25P-6C4-.120S](#) [MWDM1L-25P-6C4-.250P](#) [MWDM1L-25P-6C4-.500B](#) [MWDM1L-25S-4C4-.150B](#)
[MWDM1L-25S-5C3-.250P](#) [MWDM1L-25S-5C4-1.000B](#) [MWDM1L-25S-6C4-.500B](#) [MWDM1L-25S-6C4-1.500B](#)
[MWDM1L-31P-5C4-.125](#) [MWDM1L-31P-5C4-.500M](#) [MWDM1L-31S-4C4-.500B](#) [MWDM1L-31S-5C4-.150L](#) [MWDM1L-31S-5C4-1.000B](#) [MWDM1L-31S-6C4-.500B](#) [MWDM1L-37P-4C4-.500S1](#) [MWDM1L-37P-4C4-1.000B](#) [MWDM1L-37P-4C4-1.500S](#) [MWDM1L-37P-5C3-.250P](#) [MWDM1L-37P-5C4-.500K](#) [MWDM1L-37P-5C4-.500L](#) [MWDM1L-37P-5C4-.500P](#) [MWDM1L-37P-5C4-.625B](#) [MWDM1L-37P-5C4-1.000B](#) [MWDM1L-37P-6C4-1.000B](#) [MWDM1L-37S-4C4-.100B](#) [MWDM1L-37S-4C4-.280B](#) [MWDM1L-37S-4C4-16B](#) [MWDM1L-37S-4C4-2.000B](#) [MWDM1L-37S-5C3-.500B](#) [MWDM1L-37S-5C3-.500P](#) [MWDM1L-37S-5C4-.500F](#) [MWDM1L-37S-5C4-.500M](#) [MWDM1L-37S-5C4-.500S](#) [MWDM1L-37S-5C4-1.000B](#) [MWDM1L-37S-5C4-1.000P](#) [MWDM1L-51P-5C3-1.000B](#) [MWDM1L-51P-5C4-1.000B](#) [MWDM1L-51P-5C4-1.000P](#) [MWDM1L-51P-5C4-3.000B](#) [MWDM1L-51S-5C4-.500L](#) [MWDM1L-51S-5C4-.500S](#) [MWDM1L-51S-5C4-5.000B](#) [MWDM1L-51S-5C4-6.000B](#) [MWDM1L-51S-6C4-.500B](#) [MWDM1L-51S-6C4-1.000B](#) [MWDM1L-9P-5C4-.250B](#) [MWDM1L-9P-5C4-.500B](#) [MWDM1L-9P-5C4-.500P](#) [MWDM1L-9P-5C4-1.000B](#) [MWDM1L-9P-5C4-1.000L](#) [MWDM1L-9P-5C4-1.000P](#) [MWDM1L-9P-6C4-.110P](#) [MWDM1L-9P-6C4-.12S](#) [MWDM1L-9P-6C4-.500P](#) [MWDM1L-9S-5C3-.500B](#) [MWDM1L-9S-5C3-.500P](#) [MWDM1L-9S-5C4-.125B](#) [MWDM1L-9S-5C4-.500B](#) [MWDM1L-9S-5C4-.500F](#) [MWDM1L-9S-5C4-.500P](#) [MWDM1L-9S-5C4-1.000B](#) [MWDM1L-9S-5C4-1.000L](#) [MWDM1L-9S-5C4-1.000P](#) [MWDM1L-9S-5C4-4.000B](#) [MWDM1L-9S-6C4-.100S](#) [MWDM1L-9S-6C4-.500B](#) [MWDM1L-9S-6C4-.500P](#) [MWDM1L-9S-6C4-1.000S](#) [MWDM1L-9S-6C4-1.500B](#) [MWDM2L-100P-5C4-1.000B](#) [MWDM2L-100P-6C3-.550B](#) [MWDM2L-100P-6C4-.500B](#) [MWDM2L-100P-6C4-.750B](#) [MWDM2L-100P-6C4-1.000B](#) [MWDM2L-100S-4C4-.500P](#) [MWDM2L-100S-5C4-.109B](#)