

CR series Chip Type, High Reliability



For SMD



High Ripple Current



Low Impedance



For High Frequency



Long Life



Anti-Solvent Feature

NEW

- High reliability, High voltage (to 100V).
- Low ESR, High ripple current.
- Long life of 4000 hours at 125°C.
- SMD type : Lead free reflow soldering condition at 260°C peak complete correspondence.
- Adapted to the RoHS directive (2011/65/EU).
- Added ESR specification after the test at -40°C.

CR

High Capacitance
Long Life Assurance

CX



Specifications


Item	Performance Characteristics		
Category Temperature Range	-55 to +125°C		
Rated Voltage Range	6.3 to 100V		
Rated Capacitance Range	5.6 to 2700μF		
Capacitance Tolerance	±20% at 120Hz, 20°C		
Tangent of loss angle (tan δ)	Less than or equal to the specified value at 120Hz, 20°C		
ESR (※ 1)	Less than or equal to the specified value at 100kHz, 20°C		
Leakage Current (※ 2)	After 2 minutes' application of rated voltage, leakage current is not more than 0.03CV or 3(μA), whichever is greater.		
Temperature Characteristics (Max.Impedance Ratio)	Z+125°C / Z+20°C ≤ 1.25 (100kHz) Z-55°C / Z+20°C ≤ 1.25		
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 4000 hours at 125°C, the peak voltage shall not exceed the rated voltage.	Capacitance change	Within ± 20% of initial capacitance value (※ 3)
		tan δ	150% or less of the initial specified value
		ESR (※ 1)	150% or less of the initial specified value
		Leakage current (※ 2)	Less than or equal to the initial specified value
Shelf Life	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 85°C, 85% RH.		
ESR after Endurance (※ 1)	Less than or equal to the specified value at 100kHz, -40°C		
Damp Heat (Steady State)	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 85°C, 85% RH.	Capacitance change	Within ± 20% of initial capacitance value (※ 3)
		tan δ	150% or less of the initial specified value
		ESR (※ 1)	150% or less of the initial specified value
		Leakage current (※ 2)	Less than or equal to the initial specified value
Resistance to Soldering Heat	After soldering the capacitor under the soldering conditions prescribed here, the capacitor shall meet the specifications listed at right, provided that its temperature profile is measured at the capacitor top and the terminal. Pre-heating shall be done at 150 to 200°C and for 60 to 180 sec. The duration for over +230°C temperature at capacitor surface shall not exceed 60 seconds. In the case of peak temp, less than 250°C, reflow soldering shall be two times maximum. In the case of peak temp, less than 260°C, reflow soldering shall be once. Measurement for solder temperature profile shall be made at the capacitor top and the terminal.	Capacitance change	Within ± 10% of the initial capacitance value (※ 3)
		tan δ	130% or less than the initial specified value
		ESR (※ 1)	130% or less than the initial specified value
		Leakage current (※ 2)	Less than or equal to the initial specified value
Marking	Navy blue print on the case top		

※ 1 ESR should be measured at both of the terminal ends closest where the terminals protrude through the plastic platform.

※ 2 Conditioning : If any doubt arises, measure the leakage current after the voltage treatment of applying DC rated voltage continuously to the capacitor for 120 minutes at 105°C.

※ 3 Initial value : The value before test of examination of resistance to soldering.

Dimensions

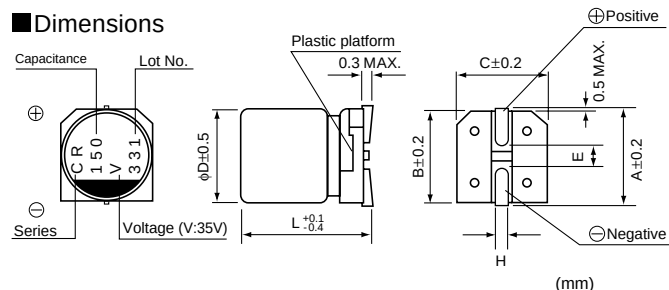


Size	φ5×6L	φ6.3×6L	φ6.3×8L	φ8×7L	φ8×10L	φ8×12L	φ10×8L	φ10×10L	φ10×12.7L
φD	5.0	6.3	6.3	8.0	8.0	8.0	10.0	10.0	10.0
L	5.9	5.9	7.9	6.9	9.9	11.9	7.9	9.9	12.6
A	6.0	7.3	7.3	9.0	9.0	9.0	11.0	11.0	11.0
B	5.3	6.6	6.6	8.3	8.3	8.3	10.3	10.3	10.3
C	5.3	6.6	6.6	8.3	8.3	8.3	10.3	10.3	10.3
E	1.6	2.1	2.1	3.2	3.2	3.2	4.6	4.6	4.6
H	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1

Voltage

V	6.3	10	16	20	25	35	50	63	80	100
Code	j	A	C	D	E	V	H	J	K	2A

Type numbering system (Example : 35V 150μF)

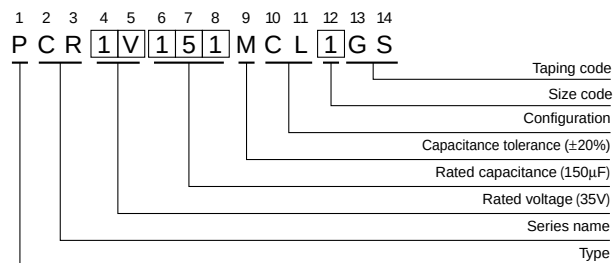

※φ6.3×8L, φ8×7L, φ8×10L, φ10×10L :

The vibration structure-resistant product is also available upon request, please ask for detail.

● Dimension table in next page.

CAT.8100C

■ Standard Ratings

Rated Voltage (V)(code)	Surge Voltage (V)	Rated Capacitance (μF)	Case Size φD × L (mm)	tan δ	Initial ESR (mΩ) (20°C / 100kHz)	Low temp. ESR after Endurance (mΩ) (-40°C / 100kHz)	Rated Ripple (mArms) (125°C / 100kHz)	Part Number
6.3 (0J)	8	180	5 × 6	0.10	55	83	900	PCR0J181MCL1GS
		330	6.3 × 6	0.10	32	48	1500	PCR0J331MCL1GS
		560	■ 6.3 × 8	0.10	20	30	1800	PCR0J561MCL4GS
		560	8 × 7	0.10	25	38	1600	PCR0J561MCL1GS
		1000	8 × 10	0.10	15	23	3700	PCR0J102MCL1GS
		1200	10 × 8	0.10	18	27	3000	PCR0J122MCL1GS
		1500	8 × 12	0.10	14	21	4000	PCR0J152MCL1GS
		1800	10 × 10	0.10	15	23	3600	PCR0J182MCL1GS
	13	2700	10 × 12.7	0.10	11	17	4700	PCR0J272MCL1GS
		120	5 × 6	0.10	60	90	800	PCR1A121MCL1GS
		180	6.3 × 6	0.10	34	51	1400	PCR1A181MCL1GS
		330	■ 6.3 × 8	0.10	22	33	1700	PCR1A331MCL4GS
		330	8 × 7	0.10	28	42	1600	PCR1A331MCL1GS
		680	▲ 8 × 10	0.10	16	24	3500	PCR1A681MCL6GS
		680	10 × 8	0.10	20	30	2900	PCR1A681MCL1GS
		1000	8 × 12	0.10	15	23	3800	PCR1A102MCL1GS
	20	1200	10 × 10	0.10	17	26	3400	PCR1A122MCL1GS
		1500	10 × 12.7	0.10	12	18	4500	PCR1A152MCL1GS
		68	5 × 6	0.08	65	98	800	PCR1C680MCL1GS
		120	6.3 × 6	0.08	36	54	1300	PCR1C121MCL1GS
		220	■ 6.3 × 8	0.08	23	35	1700	PCR1C221MCL4GS
		220	8 × 7	0.08	30	45	1500	PCR1C221MCL1GS
		470	▲ 8 × 10	0.08	17	26	3400	PCR1C471MCL6GS
		470	10 × 8	0.08	22	33	2700	PCR1C471MCL1GS
	25	560	8 × 12	0.08	16	24	3800	PCR1C561MCL1GS
		680	10 × 10	0.08	19	29	3200	PCR1C681MCL1GS
		1000	10 × 12.7	0.08	13	20	4300	PCR1C102MCL1GS
		56	5 × 6	0.08	70	105	700	PCR1D560MCL1GS
		100	6.3 × 6	0.08	41	62	1300	PCR1D101MCL1GS
		150	■ 6.3 × 8	0.08	25	38	1700	PCR1D151MCL4GS
		150	8 × 7	0.08	39	59	1200	PCR1D151MCL1GS
		330	▲ 8 × 10	0.08	19	29	3300	PCR1D331MCL6GS
	31	330	10 × 8	0.08	23	35	2600	PCR1D331MCL1GS
		470	8 × 12	0.08	18	27	3500	PCR1D471MCL1GS
		560	10 × 10	0.08	20	30	3100	PCR1D561MCL1GS
		680	10 × 12.7	0.08	14	21	4200	PCR1D681MCL1GS
		33	5 × 6	0.08	75	113	700	PCR1E330MCL1GS
		56	6.3 × 6	0.08	43	65	1300	PCR1E560MCL1GS
		100	■ 6.3 × 8	0.08	27	41	1600	PCR1E101MCL4GS
		100	8 × 7	0.08	41	62	1200	PCR1E101MCL1GS
	43	220	▲ 8 × 10	0.08	20	30	3200	PCR1E221MCL6GS
		220	10 × 8	0.08	24	36	2500	PCR1E221MCL1GS
		270	8 × 12	0.08	19	29	3300	PCR1E271MCL1GS
		330	10 × 10	0.08	20	30	3100	PCR1E331MCL1GS
		470	10 × 12.7	0.08	15	23	4100	PCR1E471MCL1GS
		27	5 × 6	0.08	80	120	600	PCR1V270MCL1GS
		47	6.3 × 6	0.08	48	72	1100	PCR1V470MCL1GS
		68	■ 6.3 × 8	0.08	31	47	1500	PCR1V680MCL4GS
	43	68	8 × 7	0.08	44	66	1200	PCR1V680MCL1GS
		150	▲ 8 × 10	0.08	22	33	3100	PCR1V151MCL6GS
		150	10 × 8	0.08	25	38	2500	PCR1V151MCL1GS
		220	8 × 12	0.08	21	32	3300	PCR1V221MCL1GS
		270	10 × 10	0.08	20	30	3100	PCR1V271MCL1GS
		330	10 × 12.7	0.08	16	24	3900	PCR1V331MCL1GS

■ Standard Ratings

Rated Voltage (V)(code)	Surge Voltage (V)	Rated Capacitance (μF)	Case Size φD × L (mm)	tan δ	Initial ESR (mΩ) (20°C / 100kHz)	Low temp. ESR after Endurance (mΩ) (-40°C / 100kHz)	Rated Ripple (mAmps)	Part Number
50 (1H)	63	12	5 × 6	0.08	88	132	600	PCR1H120MCL1GS
		22	6.3 × 6	0.08	50	75	1000	PCR1H220MCL1GS
		39	■ 6.3 × 8	0.08	36	54	1300	PCR1H390MCL4GS
		39	8 × 7	0.08	45	68	1300	PCR1H390MCL1GS
		82	▲ 8 × 10	0.08	26	39	2900	PCR1H820MCL6GS
		82	10 × 8	0.08	34	51	2200	PCR1H820MCL1GS
		120	△ 8 × 12	0.08	25	38	2900	PCR1H121MCL2GS
		120	10 × 10	0.08	25	38	3000	PCR1H121MCL1GS
63 (1J)	79	180	10 × 12.7	0.08	19	29	3500	PCR1H181MCL1GS
		6.8	5 × 6	0.08	92	138	600	PCR1J68MCL1GS
		12	6.3 × 6	0.08	51	77	1000	PCR1J120MCL1GS
		22	■ 6.3 × 8	0.08	45	68	1200	PCR1J220MCL4GS
		22	8 × 7	0.08	48	72	1100	PCR1J220MCL1GS
		39	8 × 10	0.08	28	42	2700	PCR1J390MCL1GS
		47	10 × 8	0.08	35	53	2100	PCR1J470MCL1GS
		56	8 × 12	0.08	27	41	2900	PCR1J560MCL1GS
80 (1K)	100	68	10 × 10	0.08	28	42	2800	PCR1J680MCL1GS
		100	10 × 12.7	0.08	24	36	3000	PCR1J101MCL1GS
		12	6.3 × 8	0.08	50	75	1200	PCR1K120MCL1GS
		27	8 × 10	0.08	38	57	1400	PCR1K270MCL1GS
		39	8 × 12	0.08	35	53	1600	PCR1K390MCL1GS
100 (2A)	125	47	10 × 10	0.08	33	50	1700	PCR1K470MCL1GS
		68	10 × 12.7	0.08	28	42	2100	PCR1K680MCL1GS
		5.6	6.3 × 8	0.08	55	83	1100	PCR2A5R6MCL1GS
		12	8 × 10	0.08	45	68	1200	PCR2A120MCL1GS
		18	8 × 12	0.08	42	63	1500	PCR2A180MCL1GS
		22	10 × 10	0.08	39	59	1600	PCR2A220MCL1GS
		33	10 × 12.7	0.08	28	42	2100	PCR2A330MCL1GS

Rated ripple current (mAmps) at 125°C 100kHz

No marked, [1] will be put at 12th digit of type numbering system.

△ : In this case, [2] will be put at 12th digit of type numbering system.

■ : In this case, [4] will be put at 12th digit of type numbering system.

▲ : In this case, [6] will be put at 12th digit of type numbering system.

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

<u>PCR1J120MCL1GS</u>	<u>PCR0J561MCL4GS</u>	<u>PCR1J6R8MCL1GS</u>	<u>PCR1K390MCL1GS</u>	<u>PCR0J122MCL1GS</u>
<u>PCR1C681MCL1GS</u>	<u>PCR1C561MCL1GS</u>	<u>PCR1V221MCL1GS</u>	<u>PCR2A120MCL1GS</u>	<u>PCR1H121MCL2GS</u>
<u>PCR1A181MCL1GS</u>	<u>PCR1H390MCL4GS</u>	<u>PCR1J680MCL1GS</u>	<u>PCR1V680MCL4GS</u>	<u>PCR1A331MCL4GS</u>
<u>PCR1A102MCL1GS</u>	<u>PCR1D681MCL1GS</u>	<u>PCR1J390MCL1GS</u>	<u>PCR1J470MCL1GS</u>	<u>PCR1V151MCL1GS</u>
<u>PCR1C121MCL1GS</u>	<u>PCR1C680MCL1GS</u>	<u>PCR1D101MCL1GS</u>	<u>PCR1D560MCL1GS</u>	<u>PCR1H820MCL6GS</u>
<u>PCR1D561MCL1GS</u>	<u>PCR2A5R6MCL1GS</u>	<u>PCR0J181MCL1GS</u>	<u>PCR1C221MCL4GS</u>	<u>PCR1V680MCL1GS</u>
<u>PCR1D151MCL4GS</u>	<u>PCR1J220MCL4GS</u>	<u>PCR1C471MCL1GS</u>	<u>PCR1H220MCL1GS</u>	<u>PCR1A681MCL6GS</u>
<u>PCR2A220MCL1GS</u>	<u>PCR0J182MCL1GS</u>	<u>PCR1D331MCL1GS</u>	<u>PCR1E471MCL1GS</u>	<u>PCR1J220MCL1GS</u>
<u>PCR1V151MCL6GS</u>	<u>PCR1D151MCL1GS</u>	<u>PCR1A331MCL1GS</u>	<u>PCR1E271MCL1GS</u>	<u>PCR1J560MCL1GS</u>
<u>PCR1E560MCL1GS</u>	<u>PCR0J331MCL1GS</u>	<u>PCR1V470MCL1GS</u>	<u>PCR1E221MCL1GS</u>	<u>PCR1K470MCL1GS</u>
<u>PCR2A180MCL1GS</u>	<u>PCR1A122MCL1GS</u>	<u>PCR1E221MCL6GS</u>	<u>PCR1A121MCL1GS</u>	<u>PCR1H181MCL1GS</u>
<u>PCR1K680MCL1GS</u>	<u>PCR2A330MCL1GS</u>	<u>PCR0J272MCL1GS</u>	<u>PCR1H820MCL1GS</u>	<u>PCR1K120MCL1GS</u>
<u>PCR1H390MCL1GS</u>	<u>PCR1C221MCL1GS</u>	<u>PCR1J101MCL1GS</u>	<u>PCR0J152MCL1GS</u>	<u>PCR1C102MCL1GS</u>
<u>PCR1E330MCL1GS</u>	<u>PCR1V331MCL1GS</u>	<u>PCR1A681MCL1GS</u>	<u>PCR1A152MCL1GS</u>	<u>PCR1E101MCL4GS</u>
<u>PCR0J102MCL1GS</u>	<u>PCR1V270MCL1GS</u>	<u>PCR1E331MCL1GS</u>	<u>PCR1K270MCL1GS</u>	<u>PCR1D331MCL6GS</u>
<u>PCR1E101MCL1GS</u>	<u>PCR1V271MCL1GS</u>	<u>PCR1D471MCL1GS</u>	<u>PCR0J561MCL1GS</u>	<u>PCR1C471MCL6GS</u>
<u>PCR1H120MCL1GS</u>	<u>PCR1H121MCL1GS</u>			