
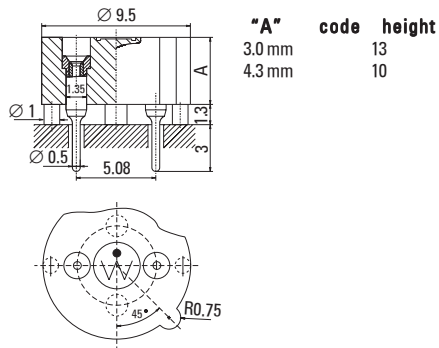


## Holder / No. 560

PC Mount,  
for TR5®/TE5® Fuses

## Holes in PCB



## Specifications

## Packaging

1	bulk (1000 pcs.)
0	bulk (500 pcs.)

## Order Number

Holder	No. 560 0000 13 1
Holder	No. 560 0000 10 0
Holder	No. 560 0000 10 1

## Mounting

PC Board, 5.08 mm pin spacing

## Materials

Holder: Thermoplastic, UL 94 V-0  
Polyester PCT  
Metal parts: Copper alloy; solderable tinned

## Electrical Data (23 °C)

Rated Voltage: 250 V  
Max. Current/Power: 6.3 A/1.6 W

## Soldering Heat Resistance

max. 280 °C, 10 s (Wave)

## Minimum Cross Section

Conducting path - 0.1 mm<sup>2</sup>

## Unit Weight


0.4 g


Order  
Information


Qty.	Order- Number	Series		code height	Packaging
		560	0000		

Specifications are subject  
to change without notice

## Holder / No. 559

PC Mount,  
for TR5®/TE5® Fuses  
leadfree

## Holes in PCB



## Packaging

000	bulk (1000 pcs.)
-----	------------------

## Mounting

PC Board, 7.18 mm pin spacing

## Materials

Holder: Black Thermoplastic, UL94 V-0  
Polyamide PA 6.6  
Metal parts: Copper alloy; solderable  
tinned

## Electrical Data (23 °C)

Rated Voltage: 250 V  
Max. Current/Power: 6.3 A/1.6 W

## Solderability

max. 260 °C, 10 s (Wave)

## Minimum Cross Section

Conducting path - 0.1 mm<sup>2</sup>

## Unit Weight

0.63 g


Order  
Information

Qty.	Order- Number	Series		Packaging
		559	0000	000

Specifications are subject  
to change without notice

Note: 1.00 means the number one with two decimal places. 1,000 means the number one thousand.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[56000001009](#) [55900000001](#) [56000001019](#) [56000001319](#)