


UR4KB60 - UR4KB100

Single Phase 4.0AMPS. Glass Passivated Bridge Rectifiers

D3K

Features

- ✧ UL Recognized File # E-326243
- ✧ Glass passivated junction
- ✧ Ideal for printed circuit board
- ✧ High case dielectric strength
- ✧ Plastic material has Underwriters laboratory flammability Classification 94V-0
- ✧ Typical IR less than 0.1uA
- ✧ High surge current capability
- ✧ High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs.,(2.3kg) tension
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode

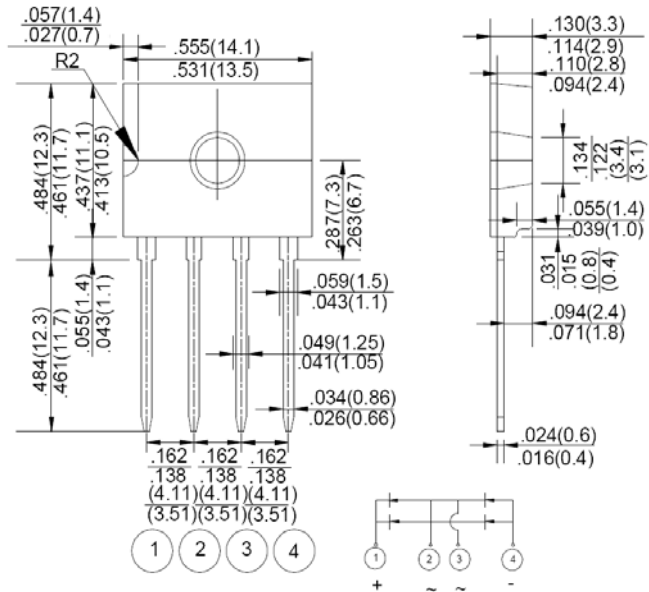

Mechanical Data

- ✧ Case: Molded plastic body
- ✧ Terminals: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208
- ✧ Weight: 1.41 grams
- ✧ Mounting Torque : 0.8 N.M max

Dimensions in inches and (millimeters)



Marking Diagram

- UR4KBXX = Specific Device Code
 G = Green Compound
 Y = Year
 WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.






Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	UR4KB 60	UR4KB 80	UR4KB 100	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	600	800	1000	V
Maximum Average Forward Current 60Hz sine wave resistance load Without heat sink $T_A=120^{\circ}C$ With heat sink $T_A=138^{\circ}C$	$I_{F(AV)}$	2 4			A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	135			A
Rating of fusing ($t < 8.3ms$)	I^2T	75			A ² S
Maximum Instantaneous Forward Voltage (Note 1) @ 2 A	V_F	1			V
Maximum DC Reverse Current at Rated DC Block Voltage	I_R	10			uA
Typical Thermal Resistance	$R_{\theta JA}$ $R_{\theta JC}$ $R_{\theta JL}$	14 8.2 9.3			°C/W
Operating Temperature Range	T_J	- 55 to + 150			°C
Storage Temperature Range	T_{STG}	- 55 to + 150			°C

Note 1 : Pulse Test with PW=300 usec, 1% Duty Cycle

RATINGS AND CHARACTERISTIC CURVES (UR4KB60 THRU UR4KB100)

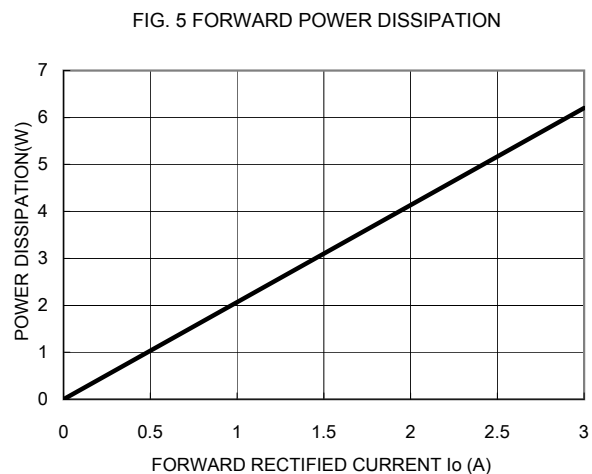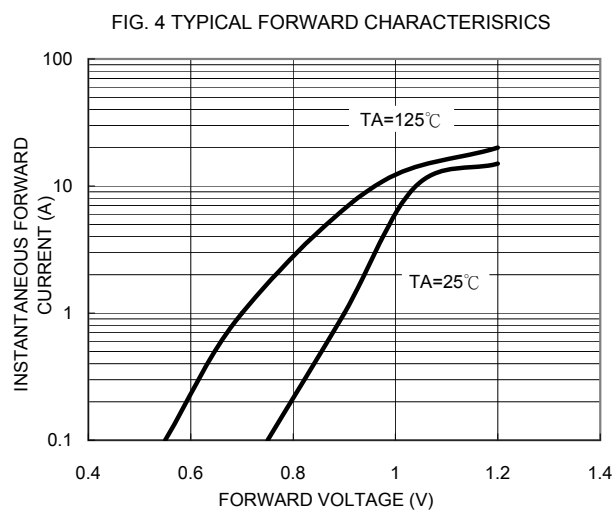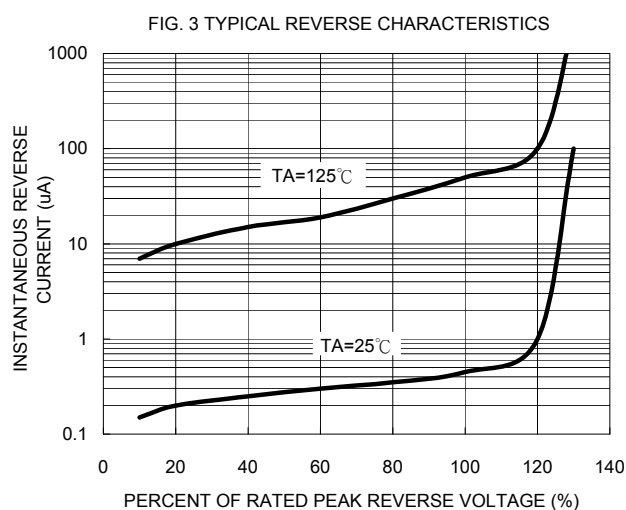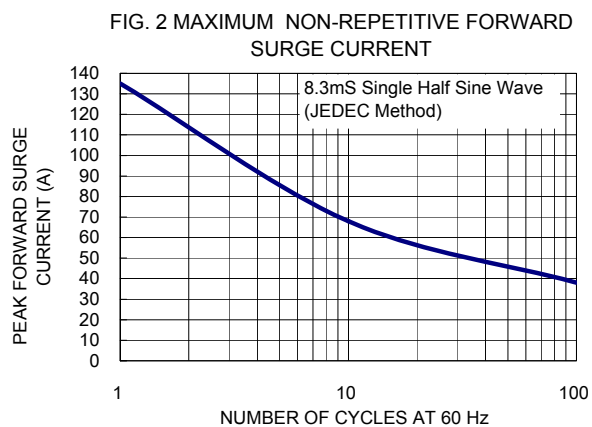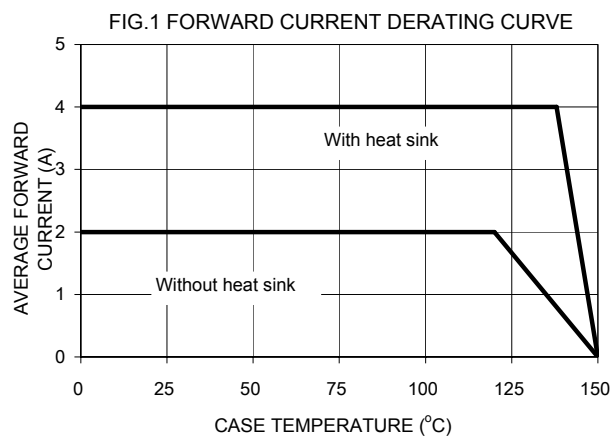

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Taiwan Semiconductor:](#)

[UR4KB100](#) [UR4KB60](#) [UR4KB80](#)